



MILLWORK CATALOG

MOULDING, MILLWORK
& STAIRS

2025 EDITION



TABLE OF CONTENTS

MOULDING

CEILING

CROWN	6
BED, COVE	8

DOOR & WINDOW

BACK BAND, BRICK MOULD	10
CASING	12
DOOR STOP	16
GLASS BEAD, MULL COVER, T-ASTRAGAL	17
WATER TABLE, WINDOW STOOL	18

WALL & CABINET

BATTEN STRIP, LIP MOULD	19
PANEL MOULD	20
PANEL STRIP, PICTURE MOULD, CHAIR RAIL ...	21
MANTLE MOULD, HAND RAIL	22

PATTERN STOCK

NICKEL GAP, BEADED CEILING	23
----------------------------------	----

FLOOR

BASE	24
BASE, BASE CAP, BASE SHOE	28

GENERAL PURPOSE

CHAMFER STRIP, INSIDE & OUTSIDE CORNERS ...	29
LATTICE, NOSING, SCREEN MOULD	30
ROUNDS	31

S4S

RAW PINE, PRIMED PINE	32
RADIATA C+PINE, OAK, KNOTTY ALDER, POPLAR, MAPLE ...	33
SCREEN STOCK, MDF BOARDS, PARTICLE BOARDS ...	34

ACCESSORIES

CORNER BLOCKS, POLE SOCKETS, SHELF BRACKETS ...	36
---	----

SIMPLE CLEAN MOULDING

SIMPLE CLEAN MOULDING	38
-----------------------------	----

FIBERGLASS COLUMNS

PERMACAST COLUMNS, CAPS & BASE	41
--------------------------------------	----

BEAMS & MANTELS

WOOD-GRAINED, SMOOTH	42
WOOD-GRAINED STRAPS	43

DECORATIVE MILLWORK

BRACKET	44
CORBEL, KNEE BRACE, RAFTER TAIL	45
LOUVER, BOARD AND BATTEN SHUTTER	46

COFFMAN® STAIR PARTS

COFFMAN® STAIR PARTS

EASY STEPS TO CREATE A STAIRCASE	48
WOOD SPECIES	49
BALUSTERS	50
IRON NEWELS	56
IRON NEWELS, IRON SHOE & KNUCKLE	58
BOX NEWELS, POST SYSTEMS	59
RAIL SERIES	60
RAIL FITTINGS	64
ROSETTES, STARTING STEPS	68
SWAGELESS FITTINGS, HOLLOW TUBES, CABLE KNIT ...	69
STAIR ANATOMY	70

ATTIC STAIRS

AMERICAN STAIRWAYS, INC.

HUSKY DISAPPEARING STAIRWAY	72
-----------------------------------	----

LOUISVILLE LADDER

ELITE ALUMINUM LADDER	74
ENERGY EFFICIENT ALUMINUM LADDER	76

MARWIN

THE TITAN	78
-----------------	----

FAKRO® ATTIC STAIRS

FAKRO ATTIC STAIRS®

LMB METAL FOLDING LADDER	80
LWB WOODEN FOLDING LADDER	81
LTK ENERGY WOODEN FOLDING LADDER	83
LWF-R WOODEN FOLDING LADDER	84
LWF-R INSULATED WOODEN FOLDING LADDER ...	86
LMP METAL FOLDING LADDER	88
LST METAL SCISSOR LADDER	90









DOOR & MILLWORK


MOULDING

CEILING CROWN

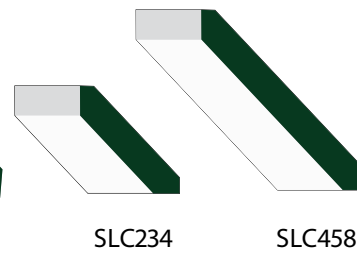
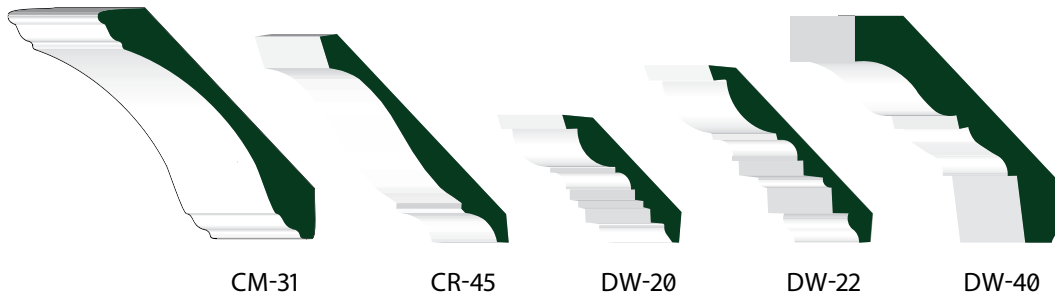
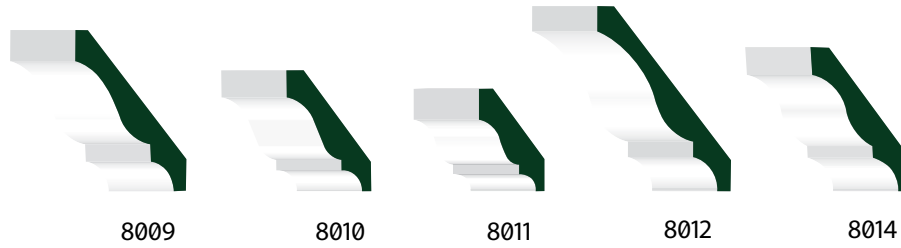


ITEM	SIZE	L	SOLID PINE	KA	FJ	MDF	PRIMED FJ	FLEX
8009	9/16" X 3-5/8"	12'	-	-	-	-	Z24	9C8
8009	9/16" X 3-5/8"	16'	-	-	6IB	Z80	6S9	-
8009	9/16" X 3-5/8"	RL	6B9	-	-	-	-	-
8010	9/16" X 2-3/4"	12'	-	-	-	-	Z23	9C9
8010	9/16" X 2-3/4"	16'	-	-	6IC	-	80P	-
8010	9/16" X 2-3/4"	8'	S76	-	-	-	-	-
8010	9/16" X 2-3/4"	RL	6BA	-	-	-	-	-
8011	9/16" X 2-1/4"	RL	6BB	-	-	-	-	-
8012	13MM X 4-1/4"	16'	-	-	-	35D	-	-
8012	9/16" X 4-1/4"	12'	-	-	-	-	12X	MD5
8012	9/16" X 4-1/4"	16'	-	-	6DZ	-	9G7	-
8012	9/16" X 4-1/4"	RL	6BC	EAA	-	-	-	-
8014	9/16" X 3-1/4"	RL	6BD	-	-	-	-	-
8012 (48"ISR)	9/16" X 4-1/4"	12'	-	-	-	-	-	6GB
8012 (96"ISR)	9/16" X 4-1/4"	12'	-	-	-	-	-	COZ
8012 (96"OSR)	9/16" X 4-1/4"	12'	-	-	-	-	-	CP5
CM-31	5/8" X 4-1/4"	16'	-	-	DDF	-	-	-
CR-45	9/16" X 5-1/4"	16'	-	-	1BB	-	Z97	-
DW-20	9/16" X 3-1/4"	16'	-	-	6M3	-	-	-
DW-22	9/16" X 4-1/2"	16'	-	-	6LU	-	-	-
DW-22	9/16" X 4-1/2"	RL	6MB	-	-	-	-	-
DW-22 (96"ISR)	9/16" X 4-1/2"	12'	-	-	-	-	-	CP3
DW-40	1-1/4" X 5-5/8"	16'	-	-	6ID	-	-	-
DW-40	1-1/4" X 5-5/8"	RL	6B6	-	-	-	-	-
DW-48	11/16" X 6-7/8"	16'	-	-	6M6	-	-	-
DW-48	11/16" X 6-7/8"	RL	6HM	-	-	-	-	-
DW-58	11/16" X 5-5/8"	16'	-	-	6H4	-	-	-
DW-58	11/16" X 5-5/8"	RL	6G5	-	-	-	-	-
DW-58	18MM X 5-5/8"	16'	-	-	-	1AH	-	-
SLC234	9/16" X 2-3/4"	12'	-	-	-	-	SC5	-
SLC234	9/16" X 2-3/4"	16'	-	-	-	-	SC3	-
SLC458	9/16" X 4-5/8"	12'	-	-	-	-	SC6	-
SLC458	9/16" X 4-5/8"	16'	-	-	-	-	SC4	-
ULDW-803	18MM X 7"	16'	-	-	-	4AB	-	-
ULDW-807	30MM X 8-1/2"	16'	-	-	-	4AD	-	-
WM-45	11/16" X 5-9/16"	16'	-	-	W45	-	-	-
WM-45	15MM X 5-1/4"	16'	-	-	-	MD9	-	-

BED

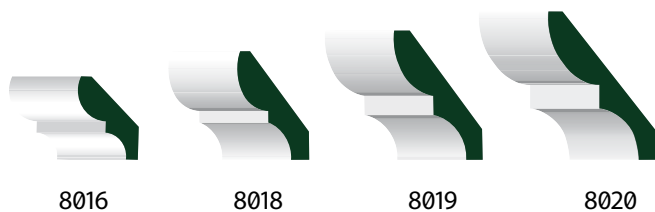

COVE

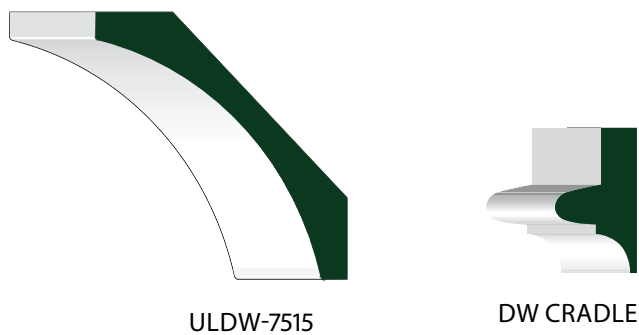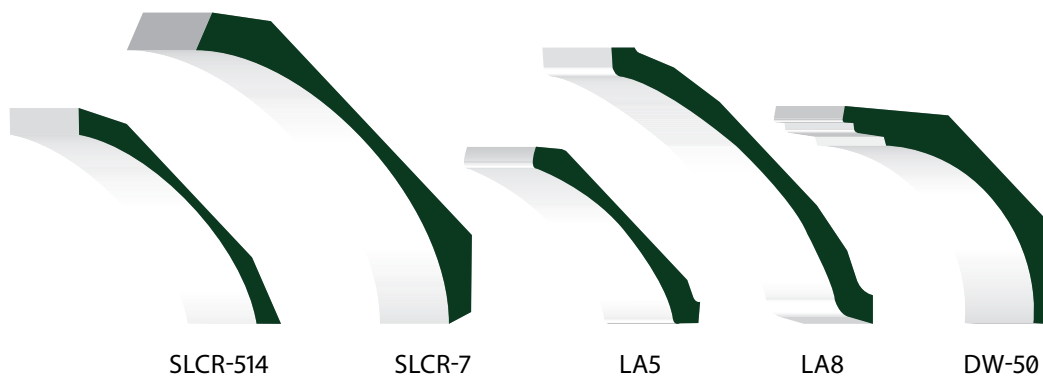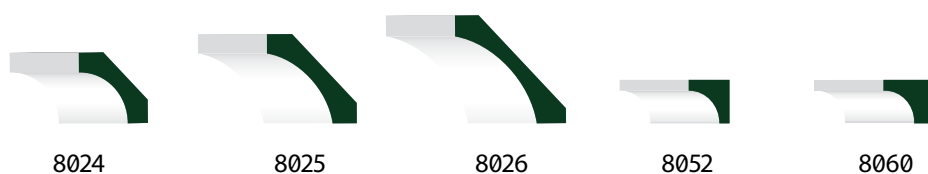

BED


ITEM	SIZE	L	SOLID PINE	FJ
8016	9/16" X 1-3/4"	8'	6E6	-
8016	9/16" X 1-3/4"	16'	-	9C1
8016	9/16" X 1-3/4"	RL	6BE	-
8018	9/16" X 2-1/4"	RL	6BF	-
8019	9/16" X 2-3/4"	RL	6BG	-
8020	9/16" X 3-1/4"	RL	6BH	-

COVE

ITEM	SIZE	L	SOLID PINE	FJ	MDF	FLEX
8024	9/16" X 1-3/4"	8'	6E7	-	-	-
8024	9/16" X 1-3/4"	RL	6BI	-	-	-
8025	9/16" X 2-1/4"	RL	6BJ	-	-	-
8026	9/16" X 2-3/4"	RL	6BK	-	-	-
8052	3/4" X 3/4"	8'	6E9	-	-	-
8052	3/4" X 3/4"	RL	6BL	-	-	-
8052 (OAK GRAIN)	3/4" X 3/4"	12'	-	-	-	OD6
8060	3/4" X 7/8"	8'	6EA	-	-	-
8060	3/4" X 7/8"	RL	6BN	-	-	-
DW CRADLE	1-1/2" X 2-1/2"	16'	-	MAK	-	-
DW CRADLE	1-1/2" X 2-1/2"	RL	MAI	-	-	-
DW-50	1-7/16" X 5-1/4"	16'	-	MAJ	-	-
DW-50	1-7/16" X 5-1/4"	RL	MAH	-	-	-
ULDW-50	35MM X 5-1/4"	16'	-	-	ZW3	-
LA5 COVE	17MM X 4-1/4"	16'	-	-	LA5	-
LA8 COVE	25MM X 6-3/4"	16'	-	-	LA8	-
SLCR-514	19MM X 5-1/4"	16'	-	-	4AX	-
SLCR-7	25MM X 7"	16'	-	-	4AW	-
ULDW-7515	27MM X 5-1/4"	16'	-	-	751	-


DOOR & WINDOW

BACK BAND, BRICK MOULD

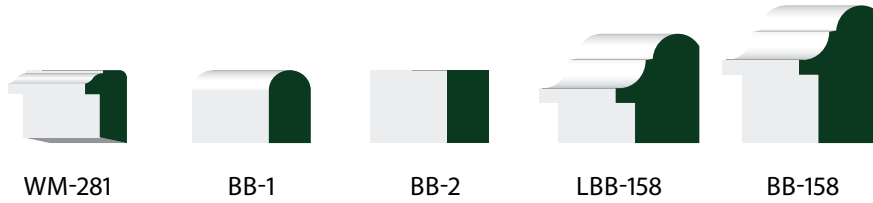

BACK BAND

ITEM	SIZE	L	SOLID PINE	PRIMED FJ	MATCHES CASING THICKNESS OF
BB-1	11/16" X 1-1/4"	16'	-	6SF	<1"
BB-158	1-3/8" X 2 1/8"	16'	-	6SH	1-1/6"
BB-2	11/16" X 1-1/4"	16'	-	6SG	<1"
LBB-158	1-3/8" X 1-11/16"	16'	-	6SI	5/8"
WM-281	11/16" X 1-1/8"	RL	6CI	-	9/16"

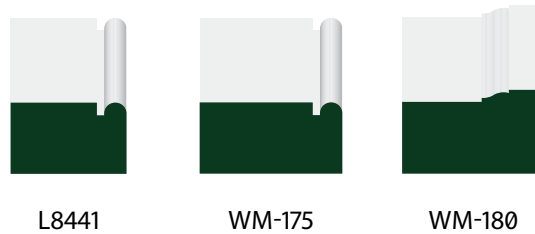

BRICK MOULD

ITEM	SIZE	L	SOLID PINE	KA	MAHOG	FJ	PRIMED FJ	COMPOSITE	FRAME SAVER	FLEX
L8441	1-1/16" X 1-5/8"	14'	-	-	-	6IN	Z29	-	-	-
WM-175	1-1/16" X 2"	7'	6EN	-	-	6L7	Z30	-	-	-
WM-175	1-1/16" X 2"	14'	-	-	-	6E3	-	-	-	-
WM-175	1-1/16" X 2"	RL	6CM	-	-	-	-	-	-	-
WM-180	1-1/4" X 2"	7'	-	-	3CJ	6L9	T31	11J	11C	-
WM-180	1-1/4" X 2"	8'	-	EAJ	3CM	-	-	11M	11D	-
WM-180	1-1/4" X 2"	8'6"	-	-	-	-	T03	-	-	-
WM-180	1-1/4" X 2"	10'	-	EAK	-	-	-	-	-	-
WM-180	1-1/4" X 2"	12'	-	-	-	-	-	-	-	OCA
WM-180	1-1/4" X 2"	14'	-	-	-	6IW	-	-	-	-
WM-180	1-1/4" X 2"	17'	-	-	-	-	6NN	-	-	-
WM-180	1-1/4" X 2"	RL	6GU	-	-	-	-	-	-	-
WM-180 (SET)	1-1/4" X 2"	3-0	-	-	-	-	Z31	-	-	-




DOOR & WINDOW

CASING



A COLONIAL
2-1/8"




A COLONIAL
2-1/4"



A COLONIAL
2-1/2"



A COLONIAL
3-1/2"



C-11



C-100



C-195



C-196



C-211



C-22



C-295



C-322



C-329



C-346



C-347



C-522



COVE
CASING



DETAIL CASING
2-3/4"



DETAIL CASING
3-1/2"



E CASING



FLUTED 3-3/8"



FLUTED 5-1/4"



H WEDGE



LC-11



MIXON



SLC



SLC DADO



STEP




ULDW-107



WM-306



WM-329



WM-356



WM-473

ITEM	SIZE	L	SOLID PINE	FJ	MDF	PRIMED FJ	FLEX	KA
A COLONIAL	5/8" X 2"	7'	-	Z56	-	-	-	-
A COLONIAL	5/8" X 2-1/8"	7'	-	1S2	-	Z33	-	-
A COLONIAL	5/8" X 2-1/8"	14'	-	6MF	-	Z98	-	-
A COLONIAL	5/8" X 2-1/8"	RL	11G	-	-	-	-	-
A COLONIAL	5/8" X 2-1/4"	7'	6FN	6FX	Z52	6GV	-	-
A COLONIAL	5/8" X 2-1/4"	10'	-	-	-	Z36	-	-
A COLONIAL	5/8" X 2-1/4"	9'	-	-	-	-	XRC	-
A COLONIAL	5/8" X 2-1/4"	14'	-	6GF	-	6GK	-	-
A COLONIAL	5/8" X 2-1/4"	17'	-	-	Z50	-	-	-
A COLONIAL	5/8" X 2-1/4"	RL	6DN	-	-	-	-	-
A COLONIAL	5/8" X 2-1/2"	7'1"	6FO	6FY	-	6NU	-	-
A COLONIAL	5/8" X 2-1/2"	9'	-	-	-	-	OAE	-
A COLONIAL	5/8" X 2-1/2"	14'2"	-	6GH	-	9G9	-	-
A COLONIAL	5/8" X 2-1/2"	RL	6DQ	-	-	-	-	-
A COLONIAL	5/8" X 3-1/2"	7'6"	-	-	-	Z51	-	-
A COLONIAL	5/8" X 3-1/2"	8'6"	-	KKD	-	-	-	-
A COLONIAL	5/8" X 3-1/2"	9'	-	-	-	-	1T5	-
A COLONIAL	5/8" X 3-1/2"	10'	-	-	-	-	-	EAH
A COLONIAL	5/8" X 3-1/2"	17'	-	7JH	-	6NG	-	-
A COLONIAL	5/8" X 3-1/2"	RL	6J9	-	-	-	-	-
C-11	1-1/16" X 3-1/2"	17'	-	7GM	-	-	-	-
C-11	1-1/16" X 3-1/2"	RL	6D4	-	-	-	-	-
C-100	5/8" X 2-1/4"	7'	-	-	-	CP9	-	-
C-100	5/8" X 2-1/4"	14'	-	C10	-	-	-	-
C-100 (SET)	5/8" X 2-1/4"	3-0	-	-	-	Z40	-	-
C-195	9/16" X 2-1/2"	7'	-	-	-	C7P	-	-
C-195	9/16" X 2-1/2"	14'2"	-	-	-	6S6	-	-
C-195	9/16" X 2-1/2"	16'	-	113	-	-	-	-
C-195	9/16" X 2-1/2"	RL	ZW2	-	-	-	-	-
C-196	1-1/8" X 3-9/16"	17'	-	9C3	-	-	-	-
C-196	1-1/8" X 3-9/16"	RL	9H5	-	-	-	-	-
C-211	5/8" X 2-1/2"	14'2"	-	6LQ	-	Z95	-	-
C-211	5/8" X 2-1/2"	7'1"	-	13M	-	CFP	-	-
C-211	5/8" X 2-1/2"	8'6"	-	13Q	-	-	-	-
C-211	5/8" X 2-1/2"	RL	6M7	-	-	-	-	-
C-22	1-1/16" X 4"	17'	-	6MO	-	-	-	-
C-22	1-1/16" X 4"	RL	6MI	-	-	-	-	-

DOOR & WINDOW

CASING



ITEM	SIZE	L	SOLID PINE	FJ	MDF	PRIMED FJ	FLEX	KA
C-295	9/16" X 3-1/2"	8'6"	-	C29	-	-	-	-
C-295	9/16" X 3-1/2"	17'	-	214	-	6S4	-	-
C-295	9/16" X 3-1/2"	RL	ZW1	-	-	-	-	-
C-322	5/8" X 2-1/2"	14'2"	-	6KY	-	6NE	-	-
C-322	5/8" X 2-1/2"	7'1"	-	1S3	-	6SR	-	-
C-322	5/8" X 2-1/2"	9'	-	-	-	-	OAG	-
C-322	5/8" X 2-1/2"	RL	6KX	-	-	-	-	-
C-329	5/8" X 2-1/4"	7'	-	-	-	Z41	-	-
C-329 (SET)	5/8" X 2-1/4"	3-0	-	-	-	Z42	-	-
C-346	5/8" X 2-1/4"	17'	-	C11	-	-	-	-
C-346	5/8" X 2-1/4"	12'	-	-	-	-	C15	-
C-346	5/8" X 2-1/4"	14'1"	-	T99	-	-	-	-
C-347	5/8" X 3-1/2"	7'1"	-	-	-	Z59	-	-
C-347	5/8" X 3-1/2"	8'6"	-	CFZ	-	Z66	-	-
C-347	5/8" X 3-1/2"	17'	-	2GB	-	6S5	-	-
C-522	9/16" X 3-1/2"	6'	-	-	-	-	MDF	-
C-522	9/16" X 3-1/2"	17'	-	8LS	-	6S3	-	-
C-522	9/16" X 3-1/2"	8'6"	-	OCX	-	6SS	-	-
C-522	9/16" X 3-1/2"	9'	-	-	-	-	OAH	-
C-522	9/16" X 3-1/2"	RL	6M9	-	-	-	-	-
COVE CASING	5/8" X 2-1/4"	14'	-	9WA	-	-	-	-
DETAIL CASING	11/16" X 2-3/4"	14'2"	-	DC2	-	-	-	-
DETAIL CASING	11/16" X 3-1/2"	16'2"	-	DC3	-	-	-	-
E CASING	5/8" X 2-1/4"	7'	-	-	-	Z38	-	-
E CASING	5/8" X 2-1/4"	14'	-	UIG	-	-	-	-
E CASING	5/8" X 2-1/4"	RL	UIF	-	-	-	-	-
E CASING	9/16" X 2-1/2"	14'2"	-	6JI	-	-	-	-
E CASING	9/16" X 2-1/2"	7'1"	T07	T06	-	-	-	-
E CASING	9/16" X 2-1/2"	RL	6DS	-	-	-	-	-
FLUTED	11/16" X 3-3/8"	15'	-	6JY	-	-	-	-
FLUTED	11/16" X 3-3/8"	RL	6J3	-	-	-	-	-
FLUTED	5/8" X 5-1/4"	16'	-	6JZ	-	-	-	-
H WEDGE	5/8" X 2-1/4"	RL	6J6	-	-	-	-	-
H WEDGE	5/8" X 2-1/8"	7'	6FJ	6FW	-	6GQ	-	-
H WEDGE	5/8" X 2-1/8"	14'	-	6GO	-	-	-	-
H WEDGE	5/8" X 2-1/8"	RL	6K1	-	-	-	-	-

ITEM	SIZE	L	SOLID PINE	FJ	MDF	PRIMED FJ	FLEX	KA
LA314	13/16" X 3-1/4"	17'	-	-	-	LA3	-	-
LC-11	5/8" X 3-1/2"	7'6"	-	-	-	Z43	-	-
LC-11	5/8" X 3-1/2"	8'6"	-	OCY	-	-	-	-
LC-11	5/8" X 3-1/2"	9'	-	-	-	-	OAI	-
LC-11	5/8" X 3-1/2"	17'	-	7GL	Z22	6NO	-	-
LC-11	5/8" X 3-1/2"	RL	6D6	-	-	-	-	-
MIXON	5/8" X 2-1/8"	RL	6DB	-	-	-	-	-
SLC-312	17MM X 3-1/2"	17'	-	-	4AT	-	-	-
SLC-312	9/16" X 3-1/2"	8'	-	-	-	Z61	-	-
SLC-312	9/16" X 3-1/2"	17'	-	-	-	6S0	-	-
SLCD-312 W/ DADO	17MM X 3-1/2"	17'	-	-	4AS	-	-	-
SLCD-312 W/ DADO	9/16" X 3-1/2"	17'	-	-	-	DDG	-	-
STEP	5/8" X 2-1/4"	RL	6DM	-	-	-	-	-
ULDW-107	20MM X 3-1/2"	16'	-	-	4AL	-	-	-
WM-306	11/16" X 2-1/4"	14'	-	13Y	-	-	-	-
WM-306	11/16" X 2-1/4"	RL	13W	-	-	-	-	-
WM-329	11/16" X 2-1/4"	RL	6J8	-	-	-	-	-
WM-356	15MM X 2-1/4"	16'	-	-	Z81	-	-	-
WM-356	5/8" X 2-1/4"	14'2"	-	6JG	-	9H4	-	-
WM-356	5/8" X 2-1/4"	7'	6FP	6FZ	-	6SV	-	-
WM-356	5/8" X 2-1/4"	RL	6J7	-	-	-	-	-
WM-356 (SET)	5/8" X 2-1/4"	3-0	Z15	-	-	Z34	-	-
WM-473	5/8" X 2-1/4"	7'1"	-	-	-	Z59	-	-
WM-473	5/8" X 2-1/4"	14'2"	-	-	-	Z60	-	-



8096



OG

STOP - OG

ITEM	SIZE	L	SOLID PINE	FJ	PRIMED FJ
8096	7/16" X 1-3/8"	7'	6EE	6G9	Z27
8096	7/16" X 1-3/8"	14'	-	6II	-
8096	7/16" X 1-3/8"	RL	6BX	-	-
OG	3/8" X 1-3/8"	8'	1BE	-	-



L8540



8540



8541

STOP - ROUND EDGE DOOR

ITEM	SIZE	L	SOLID PINE	FJ	PRIMED FJ
8540	7/16" X 1-1/8"	7'	6ER	-	-
8540	7/16" X 1-1/8"	RL	6CN	-	-
8541	7/16" X 1-3/8"	7'	6EP	6G8	7PU
8541	7/16" X 1-3/8"	8'	KKB	KKA	7PT
8541	7/16" X 1-3/8"	10'	6EQ	-	-
8541	7/16" X 1-3/8"	14'	-	6E4	-
8541	7/16" X 1-3/8"	RL	6CO	-	-
L8540 (R2E)	3/8" X 1-1/8"	7'	-	6EO	-
L8540	7/16" X 1-1/8"	7'	-	-	6SN
L8540 (R2E)	7/16" X 1-1/8"	8'	-	-	L85



O.G. STOP

STOP GARAGE

ITEM	SIZE	L	FJ
O.G. STOP	5/8" X 2-1/8"	16'	6IY



8570

GLASS BEAD

ITEM	SIZE	L	SOLID PINE
8570	1/2" X 9/16"	RL	6CP



I/S MULL



O/S MULL

MULL COVER

ITEM	SIZE	L	SOLID PINE
I/S MULL COVER	3/8" X 1-1/4"	8'	6MG
O/S MULL COVER	1/2" X 2"	9'	6MH



EXTERIOR KERF



WM-1310



WM-1315

T-ASTRAGAL

ITEM	SIZE	L	SOLID PINE	KA	MAHOG
EXTERIOR KERF (EXT PREP)	1-3/8" X 3-1/4"	8'	-	-	3CF
EXTERIOR KERF (EXT PREP)	1-3/4" X 3-1/4"	8'	GOE	-	-
EXTERIOR KERF (EXT PREP)	2-7/8" X 1-3/4"	80"	-	-	OK1
EXTERIOR KERF (EXT PREP)	2-7/8" X 1-3/4"	8'	-	-	OK2
EXTERIOR KERF (W/ WEATHERSTRIP)	1-3/4" X 3-1/4"	7'	7Y9	-	-
WM-1310	1-1/4" X 2-1/4"	7'	6KJ	-	-
WM-1310	1-1/4" X 2-1/4"	8'	6KK	EAN	-
WM-1315	1-1/4" X 2"	7'	6KH	-	-
WM-1315	1-1/4" X 2"	8'	6KI	-	-

DOOR & WINDOW

WATER TABLE, WINDOW STOOL



8284

WATER TABLE

ITEM	SIZE	L	SOLID PINE
8284	1-1/16" X 2"	RL	6CH



WM-1021



WM-1163

WINDOW STOOL

ITEM	SIZE	L	SOLID PINE	FJ	MDF	PRIMED FJ
WM-1021	11/16" X 5-1/4"	8'	-	-	-	Z32
WM-1021	11/16" X 5-1/4"	16'	-	6GR	-	S99
WM-1021	11/16" X 5-1/4"	RL	6DW	-	-	-
WM-1021	18MM X 5-1/4"	16'	-	-	MCE	-
WM-1021	11/16" X 6-1/4"	16'	-	6GS	-	-
WM-1021	11/16" X 6-1/4"	RL	6DX	-	-	-
WM-1021	18MM X 6-1/4"	16'	-	-	6LN	-
WM-1021	11/16" X 7-1/4"	16'	-	6GT	-	Z96
WM-1021	11/16" X 7-1/4"	RL	6DY	-	-	-
WM-1021	11/16" X 8-1/4"	16'	-	DDE	-	-
WM-1163	1-1/16" X 3-1/4"	RL	6CC	-	-	-




8667

BATTEN STRIP


ITEM	SIZE	L	SOLID PINE
8667	9/16" X 2-1/4"	RL	6CY




CM-12




CM-20



DECOR 2



DECOR 3



DECOR 4



DECOR 6



SHAKER LIP

LIP MOULD

ITEM	SIZE	L	SOLID PINE	FJ
CM-12	11/16" X 2"	16'	-	6G2
CM-12	11/16" X 2"	RL	6F5	-
CM-20	7/8" X 2-1/4"	RL	SPY	-
DECOR-2	3/4" X 1"	8'	6F7	-
DECOR-2	3/4" X 1"	RL	6H6	-
DECOR-3	3/4" X 1-3/8"	8'	6F8	-
DECOR-3	3/4" X 1-3/8"	RL	6H7	-
DECOR-4	11/16" X 1-5/8"	8'	6F9	-
DECOR-4	11/16" X 1-5/8"	RL	6H8	-
DECOR-6	1" X 1-5/8"	16'	-	6LW
DECOR-6	1" X 1-5/8"	RL	6H9	-
SHAKER LIP	3/4" X 2"	16'	SPR	SPE

WALL & CABINET

PANEL MOULD



8174



F MOULD



K MOULD



LWM-134



PM-1



PM-7



PM-2



PM-6



PM-3



PM-5

PANEL MOULD

ITEM	SIZE	L	SOLID PINE	FJ	PRIMED FJ	FLEX
8174	11/16" X 1-5/8"	RL	6C6	-	-	-
F MOULD	5/8" X 1-1/2"	16'	-	-	6SE	-
K-MOULD	11/16" X 1-1/4"	8'	6F6	-	-	-
K-MOULD	11/16" X 1-1/4"	12'	-	-	-	OCD
K-MOULD	11/16" X 1-1/4"	16'	-	6LY	-	-
K-MOULD	11/16" X 1-1/4"	RL	6GZ	-	-	-
LWM-134	11/16" X 1-1/2"	16'	-	6LV	-	-
LWM-134	11/16" X 1-1/2"	RL	6HK	-	-	-
PM-1	11/16" X 1-5/16"	16'	-	6M4	-	-
PM-1	11/16" X 1-5/16"	RL	6DC	-	-	-
PM-2	11/16" X 1-3/4"	RL	6DD	-	-	-
PM-3	7/8" X 1-7/8"	RL	6DE	-	-	-
PM-5	11/16" X 1-1/8"	12'	-	-	-	MDW
PM-5	11/16" X 1-1/8"	16'	-	6LX	-	-
PM-5	11/16" X 1-1/8"	RL	6MC	-	-	-
PM-6	11/16" X 2"	12'	-	-	-	MDX
PM-6	11/16" X 2"	16'	-	6DG	-	-
PM-6	11/16" X 2"	RL	6DF	-	-	-
PM-7	11/16" X 1-5/16"	8'	6F3	-	-	-
PM-7	11/16" X 1-5/16"	12'	-	-	-	MDY
PM-7	11/16" X 1-5/16"	16'	-	6DI	-	-
PM-7	11/16" X 1-5/16"	RL	6DH	-	-	-

WALL & CABINET

PANEL STRIP, PICTURE MOULD, CHAIR RAIL



8656

PANEL STRIP

ITEM	SIZE	L	SOLID PINE
8656	3/8" X 2-1/4"	8'	6EW
8656	3/8" X 2-1/4"	RL	6CX



8263



8264

PICTURE MOULD

ITEM	SIZE	L	SOLID PINE
8263	9/16" X 1-3/4"	RL	6CA
8264	9/16" X 1-3/4"	RL	6CB



CR-5



CR-6



CR-7



WM-390

CHAIR RAIL

ITEM	SIZE	L	SOLID PINE	FJ	FLEX
CR-5	11/16" X 2-1/2"	16'	-	6IT	-
CR-5	11/16" X 2-1/2"	RL	6HE	-	-
CR-6	1-1/4" X 3-1/4"	12'	-	-	OEQ
CR-6	1-1/4" X 3-1/4"	16'	-	6IU	-
CR-6	1-1/4" X 3-1/4"	RL	6HD	-	-
CR-7	1-3/16" X 2-1/2"	16'	-	6IV	-
CR-7	1-3/16" X 2-1/2"	RL	6HC	-	-
WM-390	11/16" X 2-5/8"	RL	6HG	-	-

WALL & CABINET

MANTLE MOULD, HAND RAIL



MANTLE

MANTLE MOULD

ITEM	SIZE	L	FJ
MANTLE	1-3/8" X 4-5/8"	16'	6IZ




WM-230

HAND RAIL

ITEM	SIZE	L	SOLID PINE
WM-230	1-1/2" X 1-11/16"	16'	C12
WM-230	1-1/2" X 1-11/16"	RL	6B3

PATTERN STOCK

NICKEL GAP, BEADED CEILING

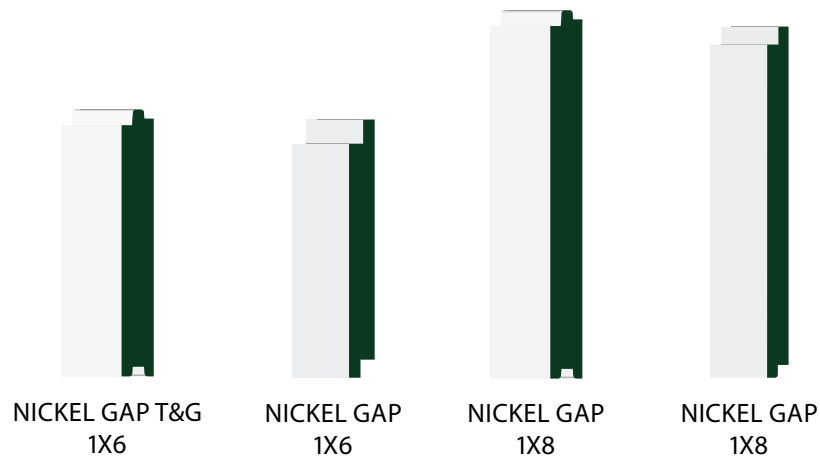

NICKEL GAP - SIMPLE & CLEAN

ITEM	SIZE	REVEAL	L	PRIMED FJ	MDF
1X6X16 NICKEL GAP	9/16" X 5-3/8"	5"	16'	SPT	-
1X8X16 NICKEL GAP	9/16" X 7-3/8"	7"	16'	SPO	-
1X8X12 NICKEL GAP	12MM X 7-5/16" (DRYWALL APPLICATION)	7"	12'	-	AZN
1X6X16 NICKEL GAP T&G	17MM X 5-1/4" (STUD APPLICATION)	5"	16'	-	PL8
1X8X16 NICKEL GAP T&G	17MM X 7-1/4" (STUD APPLICATION)	7"	16'	-	AZM
1X6X8 SHIPLAP NICKEL GAP	9/16" X 5-3/8"	5"	8'	SH6	-
1X8X8 SHIPLAP NICKEL GAP	5/8" X 7-5/16"	7"	8'	SH8	-



BC/122

BEADED CEILING

ITEM	SIZE	L	PRIMED FJ
BC122FJP	3/4" X 5-3/8"	16'	SPK

FLOOR BASE



A COLONIAL
3-1/4"



A COLONIAL
5-1/4"



B BASE



B BASE
B-9



B BASE
B-10



DWB-322



DWB-522



B-22



DWB-211



LB-11



B-11



B-395



B-695



WM-623



WM-620



WM-618



CBB-314



CBB-514



218






B-714



DETAIL
BASE 3-1/4"



DETAIL
BASE 5-1/4"

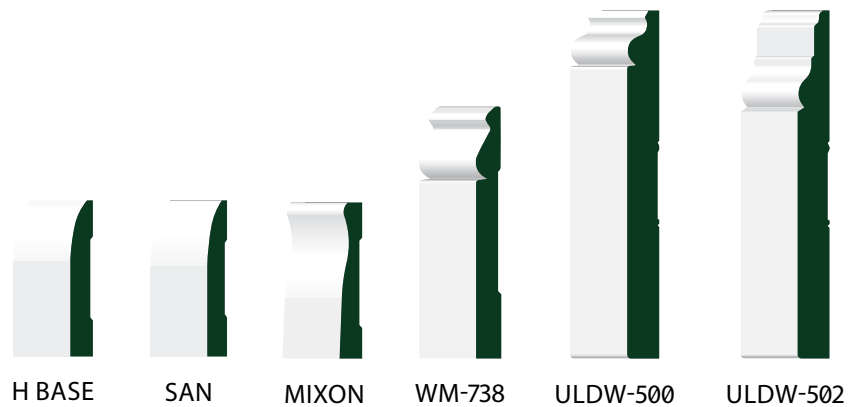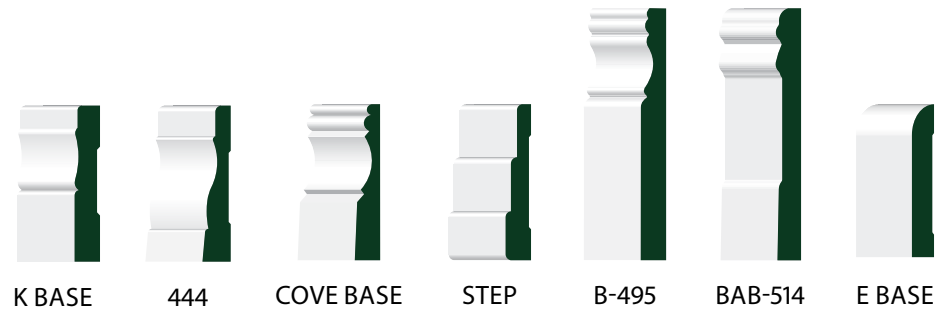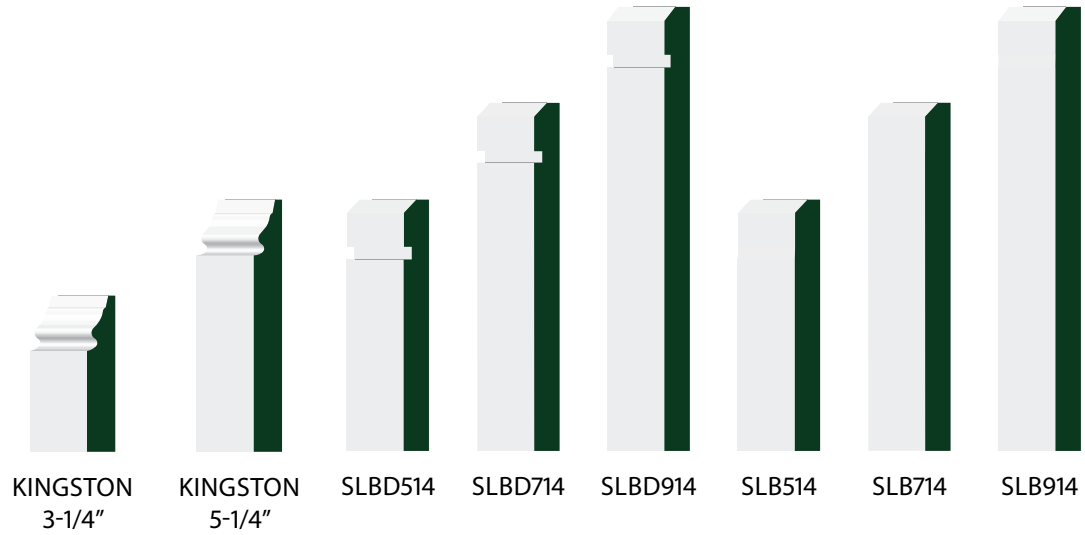

BASE

ITEM	SIZE	L	SOLID PINE	FJ	MDF	PRIMED FJ	FLEX
218	15MM X 5-1/4"	16'	-	-	11I	-	-
218	9/16" X 5-1/4"	16'	-	YA4	Z54	6S1	-
444	5/8" X 3-1/4"	16'	-	-	-	6JV	-
444	5/8" X 3-1/4"	RL	6JN	-	-	-	-
218	12MM X 5-1/4"	16'	-	-	KAP	-	-
A COLONIAL	14MM X 3-1/4"	16'	-	-	35F	-	-
A COLONIAL	9/16" X 3-1/4"	8'	S87	6G4	-	Z44	-
A COLONIAL	9/16" X 3-1/4"	12'	-	-	-	Z45	MDO
A COLONIAL	9/16" X 3-1/4"	16'	-	6GC	-	6GE	-
A COLONIAL	9/16" X 3-1/4"	RL	6DP	-	-	-	-
A COLONIAL	1/2" X 5-1/4"	16'	-	-	-	ZAX	-
A COLONIAL	9/16" X 5-1/4"	16'	-	1ZP	-	-	-
B BASE	7/16" X 3"	16'	-	6JT	-	-	-
B BASE (B-10)	1/2" X 5-1/4"	12'	-	-	-	-	OEP
B BASE (B-10)	1/2" X 5-1/4"	16'	-	6JX	-	9H2	-
B BASE (B-10)	1/2" X 5-1/4"	RL	6JP	-	-	-	-
B BASE (B-9)	9/16" X 3-1/4"	12'	-	-	-	-	1T4
B BASE (B-9)	9/16" X 3-1/4"	16'	-	6JW	MD2	9H1	-
B BASE (B-9)	9/16" X 3-1/4"	RL	6JO	-	-	-	-
B-11	1-1/16" X 4-1/2"	12'	-	-	-	-	MDU
B-11	1-1/16" X 4-1/2"	16'	-	6GJ	-	-	-
B-11	1-1/16" X 4-1/2"	RL	6CZ	-	-	-	-
B-214	9/16" X 2-1/4"	16'	-	B99	-	-	-
B-22	1" X 4-7/8"	12'	-	-	-	-	MDT
B-22	1" X 4-7/8"	16'	-	6ML	-	-	-
B-395	9/16" X 4-1/2"	12'	-	-	-	Z67	-
B-395	9/16" X 4-1/2"	16'	-	115	-	Z20	-
B-395	9/16" X 4-1/2"	RL	ZW5	-	-	-	-
B-495	9/16" X 5-1/4"	12'	-	-	-	Z68	-
B-495	9/16" X 5-1/4"	16'	-	118	-	Z21	-
B-695	9/16" X 6-1/2"	16'	-	116	-	-	-
B-714	16MM X 7-1/4"	16'	-	-	9G1	-	-
BAB-514	9/16" X 5-1/4"	16'	-	SPQ	-	-	-
CBB-314	9/16" X 3-1/4"	16'	-	9C4	-	Z94	-
CBB-514	9/16" X 5-1/4"	16'	-	CA2	-	ZYY	KL4
COVE BASE	5/8" X 3-1/4"	16'	-	9WB	-	-	-
COVE BASE	5/8" X 3-1/4"	RL	6B2	-	-	-	-

BASE

ITEM	SIZE	L	SOLID PINE	FJ	MDF	PRIMED FJ	FLEX
DETAIL BASE	11/16" X 4-1/4"	16'	-	DB4	-	-	-
DETAIL BASE	11/16" X 5-1/4"	16'	-	DB5	-	-	-
DWB-211	9/16" X 3-1/4"	16'	-	6LR	-	-	-
DWB-211	9/16" X 3-1/4"	RL	6M8	-	-	-	-
DWB-322	16MM X 3-1/4"	16'	-	-	9G2	-	-
DWB-322	9/16" X 3-1/4"	12'	-	-	Z53	Z49	MDQ
DWB-322	9/16" X 3-1/4"	16'	-	6L3	-	6S2	-
DWB-322	9/16" X 3-1/4"	RL	6KZ	-	-	-	-
DWB-522	9/16" X 4-1/2"	12'	-	-	-	-	MDR
DWB-522	9/16" X 4-1/2"	16'	-	6LT	-	-	-
DWB-522	9/16" X 4-1/2"	RL	6MA	-	-	-	-
E BASE	1/2" X 3-1/2"	RL	6DR	-	-	-	-
E BASE	5/8" X 3-1/2"	16'	-	9C6	-	-	-
H BASE	1/2" X 3-1/4"	16'	-	6GN	-	-	-
H BASE	1/2" X 3-1/4"	RL	6DT	-	-	-	-
K BASE	9/16" X 3-1/4"	16'	-	6JU	-	-	-
K BASE	9/16" X 3-1/4"	RL	6JM	-	-	-	-
KINGSTON	5/8" X 3-1/4"	16'	-	W13	-	-	-
KINGSTON	5/8" X 5-1/4"	16'	-	W15	-	-	-
LB-11	5/8" X 4-1/2"	16'	-	-	-	9H3	-
LB-11	9/16" X 4-1/2"	12'	-	-	-	Z48	MDS
LB-11	9/16" X 4-1/2"	16'	-	6GG	Z57	-	-
LB-11	9/16" X 4-1/2"	RL	6D3	-	-	-	-
LWM-444	5/8" X 3-1/4"	16'	-	-	444	-	-
MIXON	1/2" X 3-1/4"	RL	6DA	-	-	-	-
SAN	7/16" X 3"	8'	6FQ	6G3	-	6JB	-
SAN	7/16" X 3"	12'	-	-	-	Z46	-
SAN	7/16" X 3"	16'	-	6JR	-	-	-
SAN	7/16" X 3"	RL	6JJ	-	-	-	-
SAN	7/16" X 3-1/4"	16'	-	6JS	-	-	-
SAN	7/16" X 3-1/4"	RL	6JK	-	-	-	-
SLB-514	15MM X 5-1/4"	16'	-	-	4AV	-	-
SLB-514	9/16" X 5-1/4"	12'	-	-	-	Z62	-
SLB-514	9/16" X 5-1/4"	16'	-	-	-	6SA	-
SLB-714	9/16" X 7-1/4"	12'	-	-	-	Z63	-
SLB-714	9/16" X 7-1/4"	16'	-	-	-	6SB	-
SLB-914	9/16" X 9-1/4"	16'	-	-	-	6SC	-

FLOOR

BASE, BASE CAP, BASE SHOE



BASE

ITEM	SIZE	L	SOLID PINE	FJ	MDF	PRIMED FJ	FLEX
SLBD-514 W/ DADO	15MM X 5-1/4"	16'	-	-	4AU	-	-
SLBD-514 W/ DADO	9/16" X 5-1/4"	16'	-	-	-	SP1	-
SLBD-714 W/ DADO	9/16" X 7-1/4"	16'	-	-	-	SPC	-
SLBD-914 W/ DADO	9/16" X 9-1/4"	16'	-	-	-	SPD	-
STEP	9/16" X 3-1/4"	16'	-	9C7	-	-	-
STEP	9/16" X 3-1/4"	8'	6LK	-	-	-	-
STEP	9/16" X 3-1/4"	RL	6DL	-	-	-	-
ULDW-500	18MM X 7-1/4"	16'	-	-	4AE	-	-
ULDW-502	18MM X 7-1/4"	16'	-	-	4AF	-	-
WM-618	15MM X 5-1/4"	16'	-	1GA	9G5	-	-
WM-618	9/16" X 5-1/4"	16'	-	-	-	6S8	-
WM-618	9/16" X 5-1/4"	12'	-	C18	-	-	-
WM-620	9/16" X 4-1/4"	16'	-	1BC	-	-	-
WM-623	15MM X 3-1/4"	16'	-	-	9G6	C16	-
WM-623	9/16" X 3/4"	8'	-	-	-	Z47	-
WM-623	9/16" X 3-1/4"	16'	-	-	-	6S7	-
WM-623	9/16" X 3-1/4"	16'	-	1BD	-	-	-
WM-623	9/16" X 3-1/4"	12'	-	-	-	-	C16
WM-738	9/16" X 5-1/4"	16'	-	OKI	-	11O	-
WM-738	9/16" X 5-1/4"	RL	OKJ	-	-	-	-



WM-163

BASE CAP

ITEM	SIZE	L	SOLID PINE	PRIMED FJ
WM-163	11/16" X 1-3/8"	8'	-	Z69
WM-163	11/16" X 1-3/8"	16'	-	6SD
WM-163	11/16" X 1-3/8"	RL	6GX	-



8422

BASE SHOE

ITEM	SIZE	L	SOLID PINE	FJ	PRIMED FJ	FLEX	OAK	KA
8422	7/16" X 3/4"	8'	6EL	-	6IP	-	69S	-
8422	7/16" X 3/4"	12'	Z12	-	Z26	OAA	-	-
8422 (OAK GRAIN)	7/16" X 3/4"	12'	-	-	-	2A7	-	-
8422	7/16" X 3/4"	16'	Z13	6IM	6IO	-	-	-
8422	7/16" X 3/4"	RL	6CJ	-	-	-	68W	KB2

GENERAL PURPOSE

CHAMFER STRIP, INSIDE & OUTSIDE CORNERS



WM-995

CHAMFER STRIP

ITEM	SIZE	L	SOLID PINE
WM-995	3/4" X 3/4"	8'	S75
WM-995	3/4" X 3/4"	RL	6D7



LWM-999



WM-999



8200



8238



820034




DW-203

INSIDE & OUTSIDE CORNERS

ITEM	SIZE	L	SOLID PINE	FLEX
8200	1" X 1"	8'	6EG	-
8200	1" X 1"	12'	-	2A6
8200	1" X 1"	RL	6C8	-
8238	1-1/4" X 1-1/4"	8'	6EH	-
8238	1-1/4" X 1-1/4"	RL	6C9	-
820034	3/4" X 3/4"	8'	6EF	-
DW-203	1-3/8" X 1-3/8"	RL	OPJ	-
LWM-999	3/4" X 3/4"	8'	6EX	-
WM-999	5/16" X 1"	8'	6EY	-

GENERAL PURPOSE

LATTICE, NOSING, SCREEN MOULD

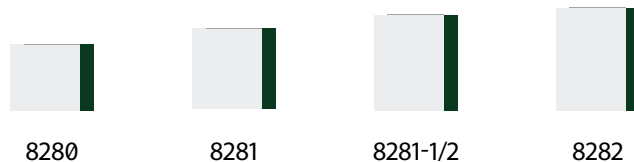


LATTICE

ITEM	SIZE	L	SOLID PINE
8280	1/4" X 1-1/8"	8'	6EI
8280	1/4" X 1-1/8"	RL	6CD
8281	1/4" X 1-3/8"	8'	6EJ
8281	1/4" X 1-3/8"	RL	6CE
8282	1/4" X 1-3/4"	8'	6EK
8282	1/4" X 1-3/4"	RL	6CG
8281-1/2	1/4" X 1-5/8"	RL	6CF



NOSING

ITEM	SIZE	L	SOLID PINE
8132	9/16" X 7/8"	RL	6BZ
8619	1/2" X 3/4"	RL	6CV



SCREEN MOULD

ITEM	SIZE	L	SOLID PINE	OAK	KA
8140	3/8" X 3/4"	8'	6LB	-	-
8140	3/8" X 3/4"	RL	6C3	-	-
8610	1/4" X 3/4"	8'	6ET	KB4	KB5
8610	1/4" X 3/4"	RL	6CQ	-	KB3
8611	1/4" X 3/4"	8'	6LC	-	-
8611	1/4" X 3/4"	RL	6CR	-	-



8912

ROUND - FULL

ITEM	SIZE	L	FIR	YELLOW PINE	LVL
89128	1-5/16"	8'	6FF	-	Z14
8912	1-5/16"	RL	6K8	6K9	-
8912	1-1/4"	12'	-	-	Z19
8912	1-1/4"	16'	-	-	6K7



8078



8080

ROUND - HALF

ITEM	SIZE	L	SOLID PINE
8078	1/2 X 1"	RL	6BU
8080	11/16" X 1-1/2"	RL	6BW



8057



8063



8065

ROUND - QUARTER

ITEM	SIZE	L	SOLID PINE	FJ	PRIMED FJ	OAK
8057	1/4" X 1/4"	8'	6E8	-	-	-
8063	1/2" X 1/2"	8'	6EB	-	-	-
8063	1/2" X 1/2"	RL	6BP	-	-	-
8065	3/4" X 3/4"	8'	T5R	-	6NP	KB8
8065	3/4" X 3/4"	12'	Z11	-	Z25	-
8065	3/4" X 3/4"	16'	Z18	6IH	6NA	-
8065	3/4" X 3/4"	RL	6BQ	-	-	67W

PRIMED FINGER-JOINT BOARDS




* Warranty subject to terms, conditions, and limitations.

The Advantages of Choosing SBP Primed Finger-Joint Boards

- ✓ **Unmatched Availability, Reliable Consistency, and Exceptional Value.**
- ✓ **Industry's Preferred Pine Substrate.**
94% of industry experts favor Pine over alternatives.
- ✓ **Built to Last.**
Exterior grade glue in both primer and substrate joints for durability.
- ✓ **Premium Finish.**
Exceeds industry standards with a multi-layer primer coat for durability and aesthetics.
- ✓ **Precision Primer.**
Avoids chip-out and minimizes installation defects.



RAW PINE, PRIMED PINE

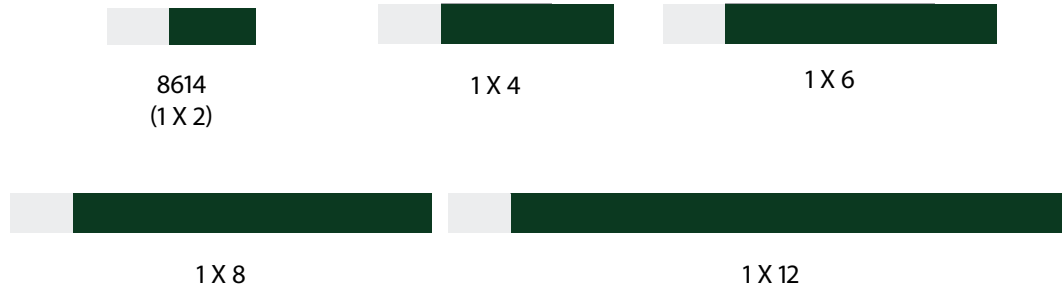

S4S RAW PINE

ITEM	SIZE	L	SOLID PINE	KA	FJ	PRIMED FJ	FLEX
8614	11/16" X 1-3/4"	8'	6EU	-	T5S	-	-
8614	11/16" X 1-3/4"	12'	-	-	-	-	OAD
8614	11/16" X 1-3/4"	16'	-	-	6IQ	9G8	-
1 X 2	11/16" X 1-1/2"	16'	-	-	C99	-	-
1 X 4	11/16" X 3-1/2"	10'	-	-	-	-	OAC
1 X 4	11/16" X 3-1/2"	17'	-	-	1NY	-	-
1 X 4	11/16" X 3-1/2"	RL	6DK	EAC	-	-	-
1 X 6	11/16" X 5-1/2"	16'	-	-	6I8	-	-
1 X 6	11/16" X 5-1/2"	RL	-	EAD	-	-	-
1 X 6	11/16" X 5-1/2"	12'	-	-	-	-	1AP
1 X 8	11/16" X 7-1/4"	16'	-	-	6I9	-	-
1 X 12	11/16" X 11-1/4"	16'	-	-	43K	-	-

S4S PRIMED PINE

ITEM	SIZE	L	PRIMED FJ	FRAME SAVER	FJEG ALBASIA
8614	11/16" X 1-3/4"	8'	Z28	-	-
8614	11/16" X 1-3/4"	16'	9G8	-	-
1 X 2	11/16" X 1-1/2"	16'	SS2	-	-
1 X 4	11/16" X 3-1/2"	7'	-	11E	-
1 X 4	11/16" X 3-1/2"	7'1"	DF7	-	-
1 X 4	11/16" X 3-1/2"	8'6"	DF8	-	-
1 X 4	11/16" X 3-1/2"	17'	1NZ	-	SAS
1 X 6	11/16" X 5-1/2"	8'	6NY	-	-
1 X 6	11/16" X 5-1/2"	16'	6NK	-	-
1 X 8	11/16" X 7-1/4"	16'	ZYX	-	-
1 X 8	11/16" X 7-1/4"	16'	6KC	-	-
1 X 12	11/16" X 11-1/4"	16'	S12	-	-

S4S RADIATA C+ PINE

ITEM	SIZE	L	RADIATA C+
1 X 4	3/4" X 3-1/2"	8'	RPA
1 X 4	3/4" X 3-1/2"	10'	RPB
1 X 4	3/4" X 3-1/2"	12'	RPC
1 X 4	3/4" X 3-1/2"	14'	RPF
1 X 4	3/4" X 3-1/2"	16'	RPG
1 X 6	3/4" X 5-1/2"	8'	RPI
1 X 6	3/4" X 5-1/2"	10'	RPJ
1 X 6	3/4" X 5-1/2"	12'	RPK
1 X 6	3/4" X 5-1/2"	14'	RPL
1 X 6	3/4" X 5-1/2"	16'	RPM
1 X 8	3/4" X 7-1/4"	8'	RPN
1 X 8	3/4" X 7-1/4"	10'	RPP
1 X 8	3/4" X 7-1/4"	12'	RPQ
1 X 8	3/4" X 7-1/4"	14'	RPR
1 X 8	3/4" X 7-1/4"	16'	RPS
1 X 12	3/4" X 11-1/4"	8'	RPT
1 X 12	3/4" X 11-1/4"	10'	RPU
1 X 12	3/4" X 11-1/4"	12'	RPV
1 X 12	3/4" X 11-1/4"	14'	RPW
1 X 12	3/4" X 11-1/4"	16'	RPX

S4S KNOTTY ALDER, MAPLE, OAK, POPLAR


ITEM	SIZE	L	KA	MAPLE	OAK	POPLAR
1 X 2	3/4" X 1-1/2"	8'	KA5	-	KA6	-
1 X 2	3/4" X 2"	RL	KB6	-	Z82	Z86
1 X 4	3/4" X 3-1/2"	8'	KA1	-	KA7	-
1 X 4	3/4" X 3-1/2"	RL	-	-	Z83	Z87
1 X 6	3/4" X 5-1/2"	8'	KA2	-	KA8	-
1 X 6	3/4" X 5-1/2"	RL	-	-	Z84	Z88
1 X 8	3/4" X 7-1/4"	8'	KA3	-	KA9	-
1 X 8	3/4" X 7-1/4"	RL	KB7	-	Z85	Z89
1 X 12	3/4" X 11-1/4"	8'	KA4	-	KB1	-
1 X 12	3/4" X 11-1/4"	RL	-	DA5	-	-

SCREEN STOCK, MDF BOARDS, PARTICLE BOARDS



S4S SCREEN STOCK

ITEM	SIZE	L	SOLID PINE
8432	1/2" X 3/4"	8'	6EM
8432	1/2" X 3/4"	RL	6CL
8614	11/16" X 1-3/4"	RL	6CS
8615	11/16" X 2-3/4"	RL	6CU
8614-1/2	11/16" X 2"	RL	6CT
S4S	1/2" X 2-1/2"	8'	6FD
S4S	1/2" X 2-1/2"	RL	6DJ



MDF BOARDS

ITEM	L	PRIMED	RAW
1 X 2	16'	DF1	Z99
1 X 4	16'	-	Z78
1 X 4	17'	104	-
1 X 6	16'	DF3	Z79
1 X 8	16'	DF4	AH4
1 X 12	16'	DF5	6PE
1 X 16	16'	-	6PF
1 X 18	16'	-	6PG
1 X 24	16'	-	6PH




BULLNOSE PARTICLE BOARD

BULLNOSE PARTICLE BOARDS


ITEM	L	RAW
1 X 12	16'	A2H0
1 X 16	16'	A1H9

ACCESSORIES

CORNER BLOCKS, POLE SOCKETS, SHELF BRACKETS



BULLSEYE



STAR



PLINTH BLOCK

CORNER BLOCKS

ITEM	SIZE	SOLID PINE	FLEX
BULLSEYE	27/32" X 3-1/2"	4G9	-
PLINTH BLOCKS	7/8" X 3-1/2" X 6-1/2"	4G4	-
STAR	3-1/2"	-	1AL




WOOD
POLE SOCKETS

POLE SOCKETS

SKU	DESCRIPTION	ITEM #
28390046	1-3/8" CLOSET POLE SOCKET WOOD	N262-972



SHELF/ROD
BRACKET FLAT
WHT



SHELF/ROD
BRACKET ROUND
HD WHT

SHELF BRACKETS

SKU	DESCRIPTION	ITEM #
28378152	SHELF/ROD BRACKET FLAT WHT	N224-501
28390046	SHELF/ROD BRACKET ROUND HD WHT	N224-428
28480106	10X12" SHELF BRACKET WHITE	N218-958
28480112	12X14" SHELF BRACKET WHITE	N245-779



10X12" SHELF
BRACKET WHITE



12X14" SHELF
BRACKET WHITE





DREAMING OF THAT NEW LOOK?

We have you covered with our new
Simple & Clean Moulding line


PATTERN STOCK

- Superior Finish
- Faster to Install
- Self Spacing
- Consistent Look

MOULDING

- Pine Substrate
- Double Pass
Premium Primer Finish
- Harvested from Sustainable
Forest
- Traditional and Trending
Profile Selection

SIMPLE & CLEAN MOULDING

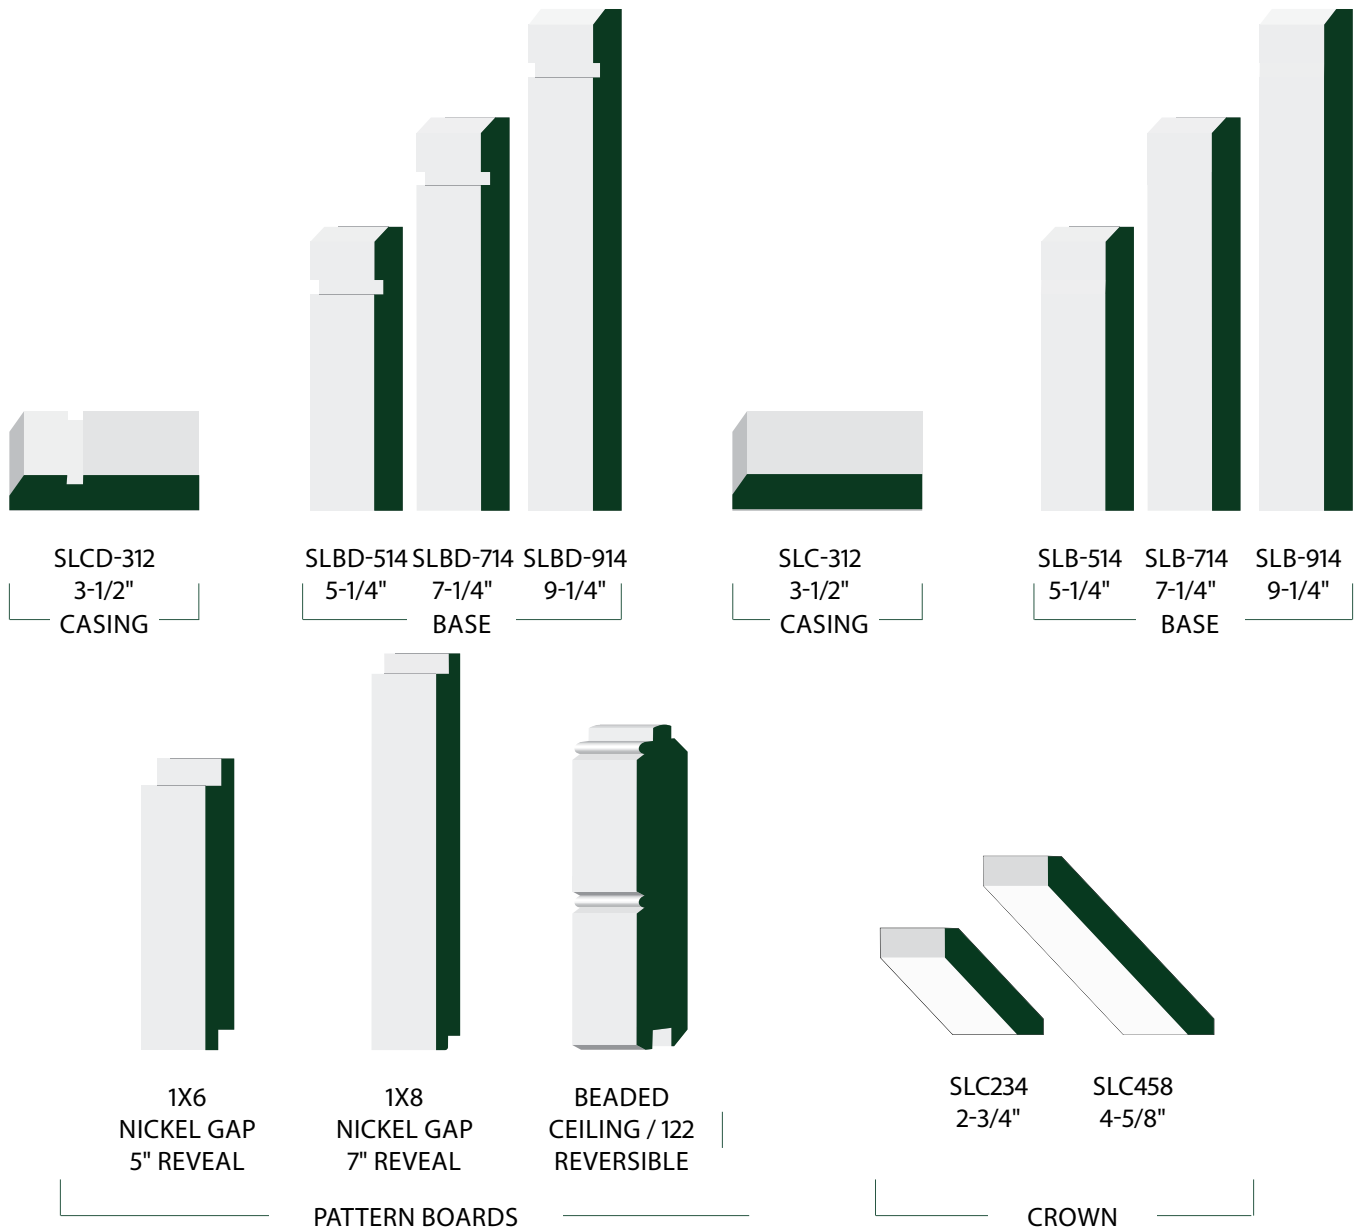


FITS IN WITH THE HOTTEST TRENDS

MODERN FARMHOUSE • TRADITIONAL • MODERN CONTEMPORARY



Round Column

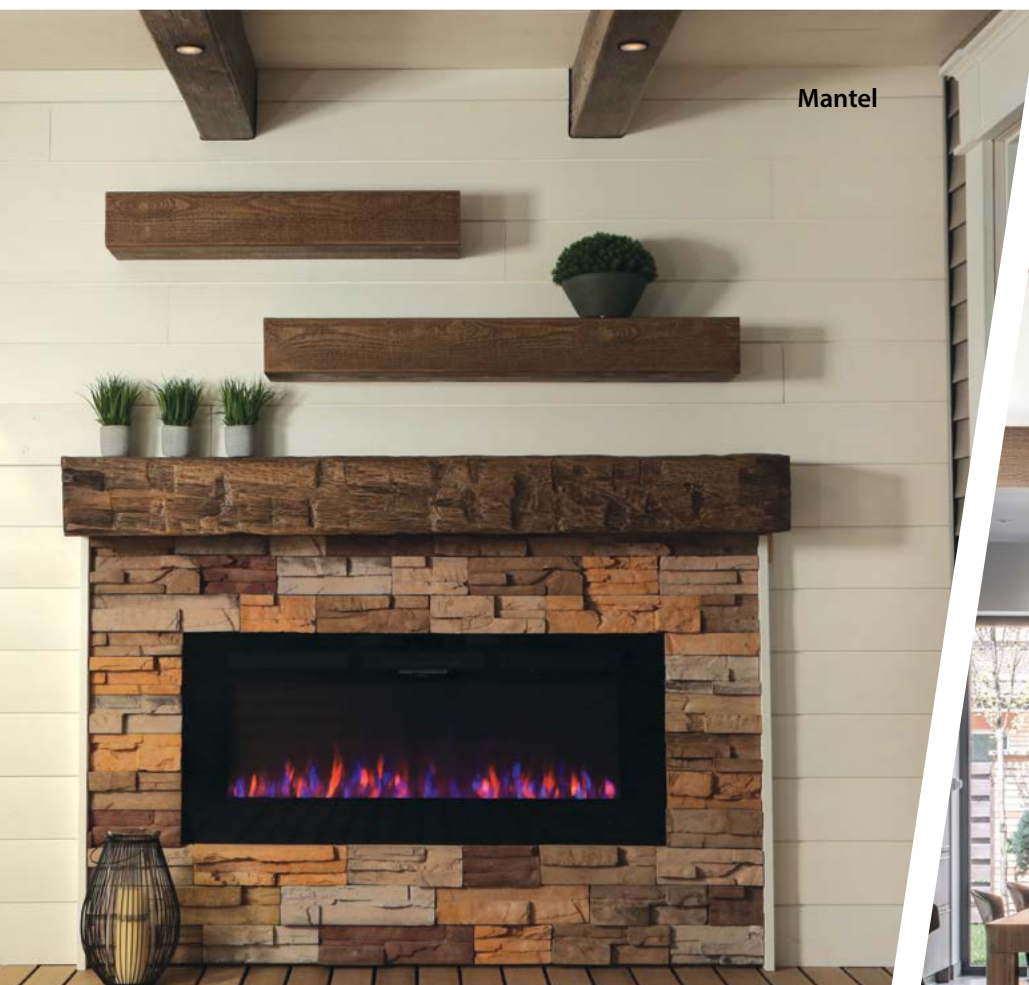

Mantel



Beams

FIBERGLASS COLUMNS

PERMACAST COLUMNS, CAPS & BASES



ROUND
SMOOTH



ROUND
NON-TAPERED



CAST PLAIN
SQUARE

PERMACAST COLUMNS

SIZE	ROUND SMOOTH	ROUND NON-TAPERED	CAST PLAIN SQUARE
8 X 8	HG3	R10	R44
8 X 9	HG4	-	-
8 X 10	HG1	-	R45
10 X 8	HF3	-	R46
10 X 10	HF1	-	-
12 X 10	HF5	R40	R62

LOAD BEARING CAPACITY

SIZE	ROUND	SQUARE
6"	8,000 LBS	8,000 LBS
8"	10,500 LBS	10,500 LBS
10"	13,990 LBS	13,990 LBS
12"	18,000 LBS	18,000 LBS

FIBERGLASS CAPS & BASES

SIZE	TUSCAN POLY	TUSCAN NON-TAPERED	SQUARE CAST
8"	HG8	R13	1XD
10"	HG5	-	-
12"	HG6	R66	R71

Tuscan Poly Cap & Base includes
Flashing Cap & Column Installation Kit

DISTRIBUTED THROUGH **DW DISTRIBUTION**

BEAMS & MANTELS

WOOD-GRAINED, SMOOTH




HAND HEWN



MESA



ROUGH SAWN



SMOOTH




TAHOE



HAND HEWN
BEAM



MESA
BEAM

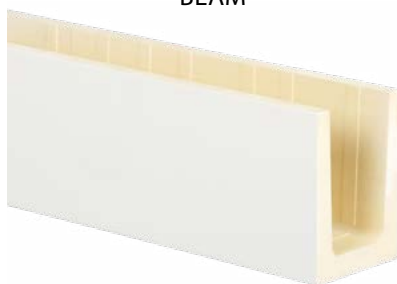

SMOOTH
BEAM



TAHOE
BEAM

WOOD-GRAINED BEAMS

GRAIN	SIZE	8'	12'	16'	20'
HAND HEWN	6 x 8	F12	F13	F14	-
HAND HEWN	8 x 10	F17	F18	F19	FZ1
HAND HEWN	10 x 12	-	-	FZ6	-
MESA	6 x 8	-	F02	F03	FZ3
MESA	8 x 10	-	F07	F08	-
SMOOTH	6 x 8	-	-	F34	FZ4
SMOOTH	10 x 12	-	-	FZ5	FZ8
TAHOE	6 x 8	-	F23	F24	-
TAHOE	8 x 10	-	F28	F29	FZ2
TAHOE	10 x 12	-	-	FZ7	-

INSTALLER NOTE:

6X8 BEAMS MOUNT TO 2X4 | 8X10 BEAMS MOUNT TO 2X6

DISTRIBUTED THROUGH **DW DISTRIBUTION**



HAND HEWN



ROUGH SAWN

WOOD-GRAINED BEAMS

GRAIN	SIZE	5'	6'
HAND HEWN	8 x 10	F38	F39
ROUGH SAWN	6 x 8	F36	-



HAMMERED BEAM STRAP

HAMMERED BEAM STRAPS

DESCRIPTION	SIZE	BEAM STRAPS
HAMMERED BEAM STRAP (SET OF 2)	6 x 8	F98

DISTRIBUTED THROUGH **DW DISTRIBUTION**

DECORATIVE MILLWORK

BRACKET



F82



F74



FY1



F75



FY0



F77

BRACKET

GRAIN	SIZE (H X W X L)	FYPON CODE	DW CODE
SMOOTH	7-1/4 X 12 X 4	BKT7X12X4	F82
SMOOTH	16 X 3 X 11-1/2	BKT12X16	F74
SMOOTH	18 X 10-1/8 X 7-1/4	BKT18X10	FY1
SMOOTH	18 X 18 X 3-1/2	BKT18X18X4	F75
SMOOTH	25 X 27-1/2 X 3-1/2	BKT25X27	FY0
WOOD GRAIN	14 X 16 X 3-1/2	BKT14X16X35S	F77

DISTRIBUTED THROUGH **DW DISTRIBUTION**



F95



F88
F89



FY3



FY2

CORBELS

GRAIN	SIZE (H X W X L)	FYPON CODE	DW CODE
WOOD GRAIN	5-1/2 X 5-1/2 X 3-1/2	COR5X5X3S	F95
WOOD GRAIN	8 X 8 X 6	COR8X8X6S	F88
WOOD GRAIN	11 X 11 X 5	COR11X11X5S	FY3
WOOD GRAIN	11-3/8 X 7 X 7-3/8	COR7X11S	F89
WOOD GRAIN	18 X 8 X 6	COR18X8X6S	FY2



FY4

KNEE BRACE

GRAIN	SIZE (H X W X L)	FYPON CODE	DW CODE
WOOD GRAIN	21 X 30 X 5	BKTCV21X30X6S	FY4



FZ0

RAFTER TAIL

GRAIN	SIZE (H X W X L)	FYPON CODE	DW CODE
WOOD GRAIN	3-1/2 X 5-1/2 X 18	BMRTSC4X6X18RS-4	FZ0

DISTRIBUTED THROUGH **DW DISTRIBUTION**

DECORATIVE MILLWORK

LOUVER, BOARD AND BATTEN SHUTTER



ROUND
BRICKMOULD
STYLE



VERTICAL
BRICKMOULD
STYLE

DECORATIVE & FUNCTIONAL LOUVERS

GRAIN	DESCRIPTION	SIZE (H X W X L)	FYPON CODE	DW CODE
SMOOTH	Decorative Round Brickmould Style	22 X 1-5/8	RLV22	FY7
SMOOTH	Decorative Vertical Brickmould Style	12 X 24	LV12X24	FY5
SMOOTH	Decorative Vertical Brickmould Style	18 X 36 X 1-5/8	LV18X36	FY6
SMOOTH	Decorative Vertical Brickmould Style	12 X 18	LV12X18	FY8
SMOOTH	Functional Vertical Brickmould Style	12 X 18 X 2	FLV12X18	FY9



BOARD AND BATTEN SHUTTER

GRAIN	SIZE (H X W X L)	FYPON CODE	DW CODE
WOOD GRAIN	14 X 36 X 1-1/2	SH3PC14X36RS	F09
WOOD GRAIN	14 X 48 X 1-1/2	SH3PC14X48RS	F05
WOOD GRAIN	14 X 60 X 1-1/2	SH3PC14X60RS	FZ9
WOOD GRAIN	14 X 72 X 1-1/2	SH3PC14X72RS	F04

DISTRIBUTED THROUGH **DW DISTRIBUTION**

Coffman
STAIR PARTS[®]

**STAIR
PARTS**

COFFMAN® STAIR PARTS


EASY STEPS TO CREATE A STAIRCASE



EASY STEPS TO CREATE A STAIRCASE

STEP BY STEP GUIDE

Designing your dream staircase is now simpler and more enjoyable with Coffman Stair Parts. No matter your personal taste or the style of your home, we make it easy to transform your vision into a stunning reality. Follow our straightforward, step-by-step guide to craft a staircase that's not just a structure, but a centerpiece of your home.

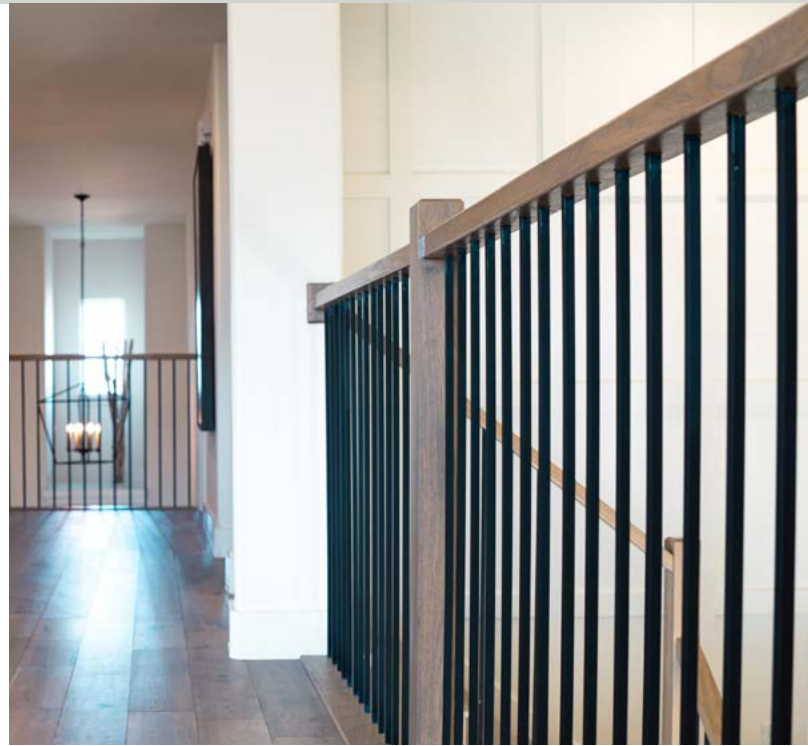

Pick Your Newel

In Over-The-Post stair designs, the handrail flows continuously over the newels and balusters, spanning the entire length of the stairway. This style allows for the incorporation of various decorative elements, enhancing the aesthetic appeal. Post-to-Post stairways are characterized by handrails that connect to the upper square block of the newel, creating a distinct, structured look.



OVER-THE-POST



POST-TO-POST

Pick Your Wood Species

Personalize your staircase with our exquisite selection of wood species, including Red Oak, White Oak, Poplar, Hard Maple, Mahogany, and Primed. For those seeking a unique flair, we also provide a broad array of custom wood species to align with your specific taste and style. From our standard offerings to your personalized selections, we are committed to creating a staircase that perfectly accentuates your home.



DISTRIBUTED THROUGH **DW DISTRIBUTION**


STOCKING



WOOD SPECIES ABBREVIATIONS

RED OAK _____	RO
WHITE OAK _____	WO
POPLAR _____	POP
HARD MAPLE _____	HM
MAHOGANY _____	MAH
PRIMED _____	PRM
HICKORY _____	HIC
CHERRY _____	CHR
WALNUT _____	WAL
ALDER _____	ALD
BEECH _____	BEE
WHITE PINE _____	WPN
SOUTHERN YELLOW PINE _____	SYN
SPRUCE PINE FIR _____	SPF
BRAZILIAN CHERRY _____	BCH

SPECIAL ORDER



Please call for other available
special order species.

DISTRIBUTED THROUGH **DW DISTRIBUTION**

Coffman
STAIR PARTS

Pintop Balusters *Use with non-plowed handrail*



5015 DETAIL



5040 DETAIL

5025 DETAIL



5610 DETAIL

McCoy's Millwork | Moulding

TRADITIONAL SERIES

Square Top Balusters

					
	Base Width 1-1/4"	31"	9-1/2"	16-1/8"	5-3/8"
	C-5070				
		34"	9-1/2"	19-1/8"	5-3/8"
	C-5070				
		36"	9-1/2"	21-1/8"	5-3/8"
	C-5070				
		39"	9-1/2"	24-1/8"	5-3/8"
	C-5070				
		41"	9-1/2"	26-1/8"	5-3/8"
	C-5070				

					
	Base Width 1-1/4"	31"	6-7/8"	19"	5-1/8"
	C-5067				
		34"	6-7/8"	22"	5-1/8"
	C-5067				
		36"	6-7/8"	24"	5-1/8"
	C-5067				
		39"	9-7/8"	24"	5-1/8"
	C-5067				
		41"	11-7/8"	24"	5-1/8"
	C-5067				



DISTRIBUTED THROUGH DW DISTRIBUTION

HAMPTON SERIES

Pintop Balusters

Use with non-plowed handrail

	6"	2-7/8"	10-15/16"	5-11/16"	8-1/2"	34"
C-5611	6"	2-7/8"	12-15/16"	5-11/16"	8-1/2"	36"
C-5611	6"	2-7/8"	12-15/16"	5-11/16"	11-1/2"	39"
C-5611	6"	2-7/8"	12-15/16"	5-11/16"	13-1/2"	41"

Base Width 1-3/4"

Square Top Balusters

Use with 1 3/4" plowed handrail

	5-3/4"	17-1/2"	12-3/4"	36"
C-5005	5-3/4"	17-1/2"	17-3/4"	41"

Base Width 1-3/4"

	6"	2-7/8"	10-15/16"	5-11/16"	8-1/2"	34"
C-5601	6"	2-7/8"	12-15/16"	5-11/16"	8-1/2"	36"
C-5601	6"	2-7/8"	12-15/16"	5-11/16"	11-1/2"	39"
C-5601	6"	2-7/8"	12-15/16"	5-11/16"	13-1/2"	41"

Base Width 1-3/4"



DISTRIBUTED THROUGH DW DISTRIBUTION

BRISTOL SERIES

Pintop Balusters

Use with non-plowed handrail

					
Base Width 1-3/4"	38"	42"	Base Width 1-3/4"	36"	39"
C-5151 LB	10-1/2"	14-1/2"	C-5151	8-1/2"	11-1/2"
	5"	5"		5"	5"
	15-5/8"	15-5/8"		15-5/8"	18-7/8"
	6-7/8"	6-7/8"		6-7/8"	6-1/2"

	
Base Width 1-3/4"	36"
C-2315	8-1/4"
	27-3/4"
	14-1/4"
	27-3/4"

		
Base Width 1-3/4"	39"	41"
C-5141	8-1/2"	8-1/2"
	5"	5"
	18-7/8"	21"
	6-5/8"	6-1/2"
		15-5/8"
		6-7/8"



ART DECO SERIES

Pintop Balusters

Use with non-plowed handrail

			
Base Width 1-9/16"	36"	39"	41"
C-5845	9-1/4"	9-1/4"	9-1/4"
	26-3/4"	29-3/4"	31-3/4"

Round
Base



DISTRIBUTED THROUGH **DW DISTRIBUTION**

CHIPPENDALE SERIES

Pintop Balusters

Use with non-plowed handrail

				
Base Width 1-3/4"	34"	36"	39"	41"
C-5211	8-1/2"	8-1/2"	8-1/2"	8-1/2"
	5-1/2"	5-1/2"	5-1/2"	5-1/2"
	9-1/2"	9-1/2"	9-1/2"	9-1/2"
	10-1/2"	12-1/2"	15-1/2"	17-1/2"

Square Top Balusters

Use with 1 3/4" plowed handrail

				
Base Width 1-3/4"	34"	36"	39"	41"
C-5201	8-1/2"	8-1/2"	8-1/2"	8-1/2"
	5-1/2"	5-1/2"	5-1/2"	5-1/2"
	9-1/2"	9-1/2"	9-1/2"	9-1/2"
	4-1/2"	6-1/2"	9-1/2"	11-1/2"
	6"	6"	6"	6"



MARION SERIES

Pintop Balusters

Use with non-plowed handrail

				
Base Width 1-3/4"	34"	36"	39"	41"
C-5251	8-1/2"	8-1/2"	8-1/2"	8-1/2"
	25-1/2"	27-1/2"	30-1/2"	32-1/2"

Square Top Balusters

Use with 1 3/4" plowed handrail

				
Base Width 1-3/4"	34"	36"	39"	41"
C-5241	8-1/2"	8-1/2"	8-1/2"	8-1/2"
	19-1/2"	21-1/2"	24-1/2"	26-1/2"
	6"	6"	6"	6"




DISTRIBUTED THROUGH DW DISTRIBUTION

GATLIN SERIES


Pintop Balusters

Use with non-plowed handrail

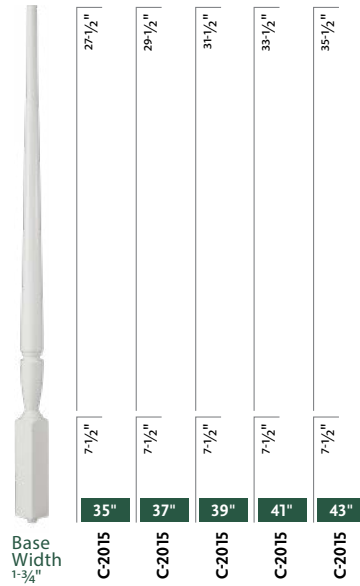

Square Top Balusters

Use with 1 3/4" plowed handrail

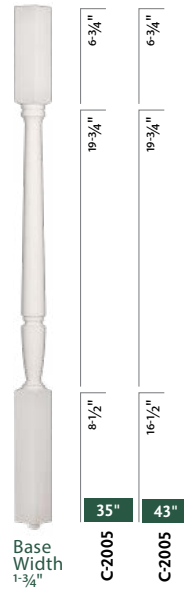

2015 DETAIL




2005 DETAIL

CRAFTSMAN SERIES

Square Top Balusters

Use with plowed handrail

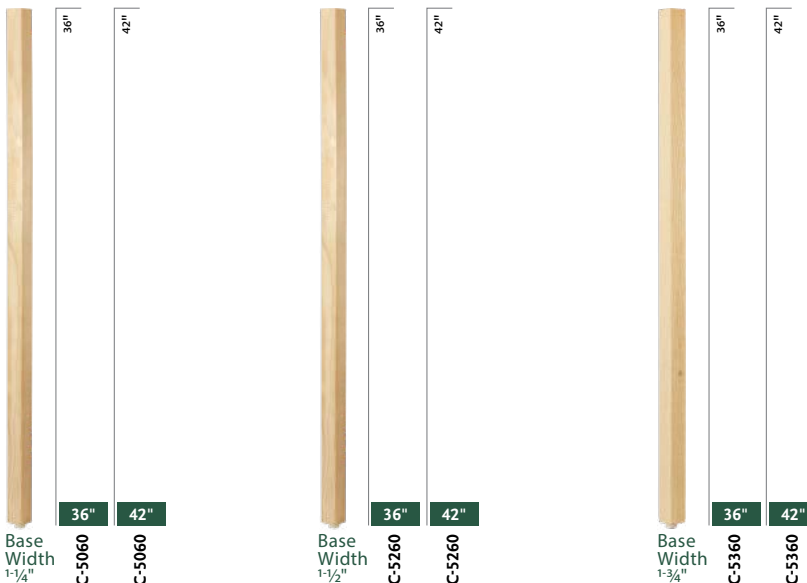

5060/5260/5360 DETAIL

DISTRIBUTED THROUGH **DW DISTRIBUTION**


COFFMAN® STAIR PARTS

IRON NEWELS




1/2" Iron Baluster Options

TWIST & BASKET SERIES

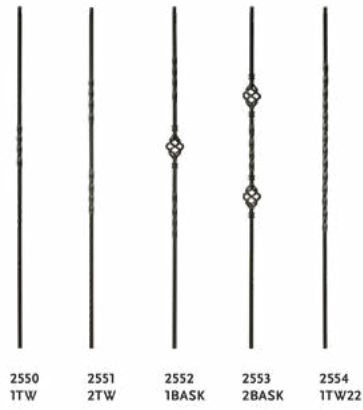


VERSATILE SERIES

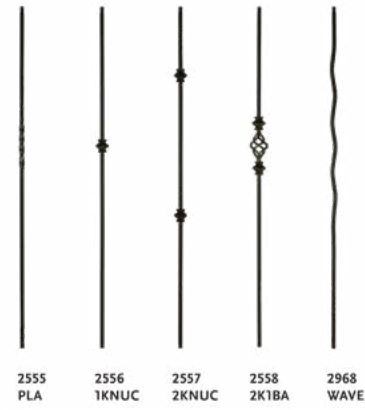


RIBBON SERIES




KNEE WALL SERIES

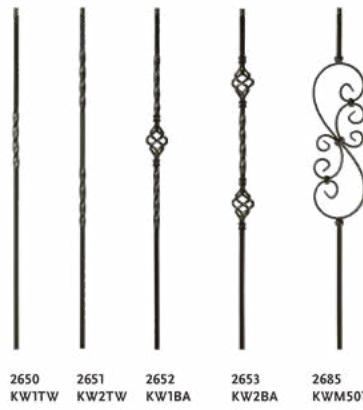


SCROLL SERIES

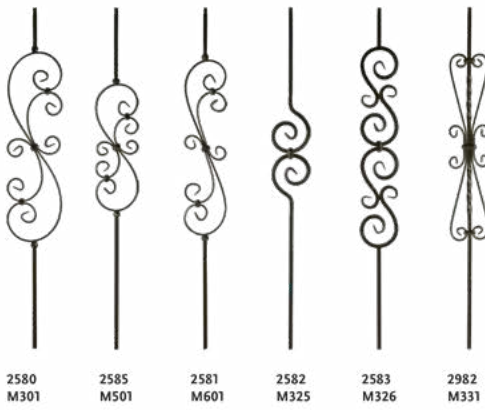

MEDALLION SERIES

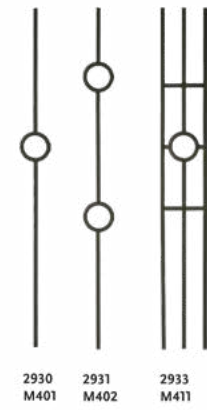


BELLY SERIES

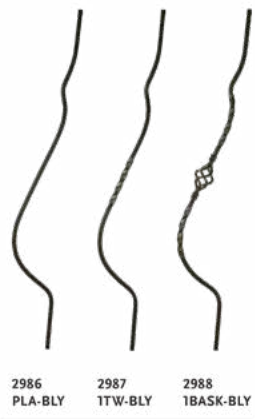

ROUND SERIES




LIBERTY SERIES

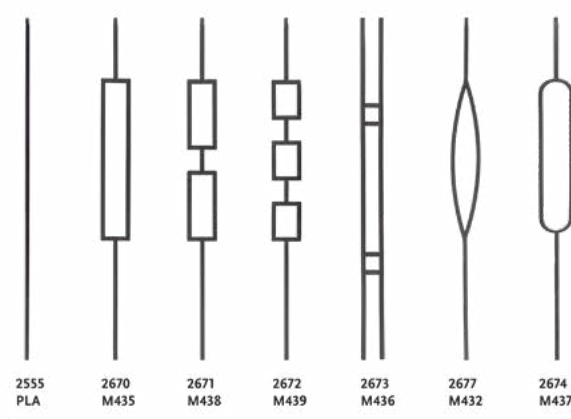

DISTRIBUTED THROUGH DW DISTRIBUTION

9/16" Iron Baluster Options

MEDITERRANEAN

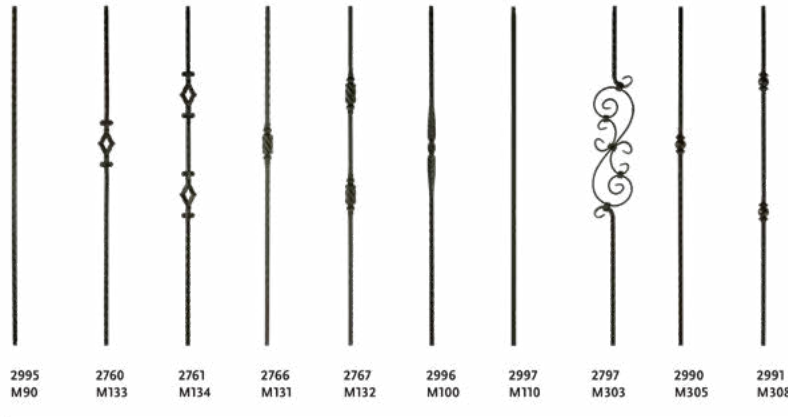

GOTHIC



5/8" Iron Baluster Options

9/16" ROUND SERIES



VENETIAN SERIES




MODERN VENETIAN SERIES



3/4" Iron Baluster Options

MEGA BALUSTER SERIES

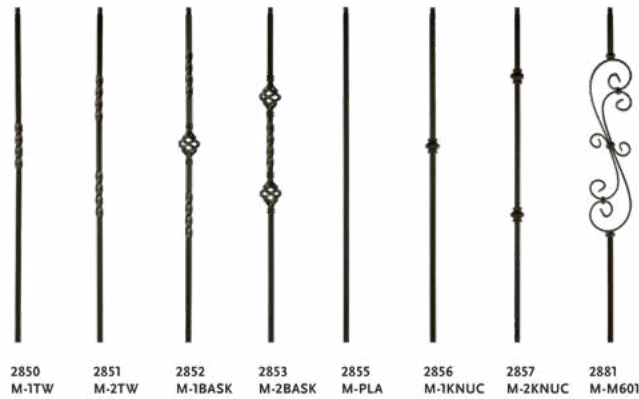


DISTRIBUTED THROUGH **DW DISTRIBUTION**

COFFMAN® STAIR PARTS


IRON NEWELS, IRON SHOE & KNUCKLE OPTIONS



Iron Newels

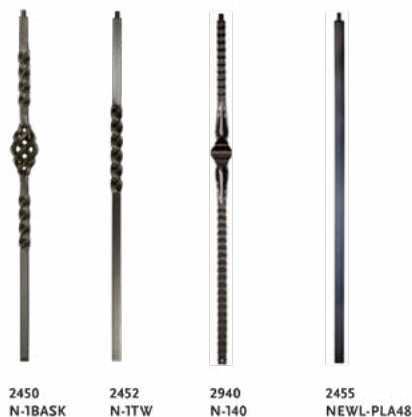

DECORATIVE PANELS

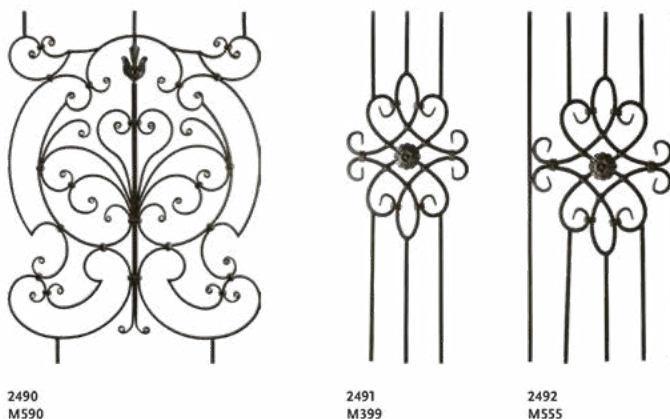

Shoe & Knuckle Options

1/2" SHOES



1/2" ROUND SHOES



5/8" SHOES



9/16" SHOES



9/16" ROUND SHOES



3/4" SHOES



UNIVERSAL (1/2" OR 9/16") SHOES



NEWEL KIT



DISTRIBUTED THROUGH **DW DISTRIBUTION**

Box Newels



Post-to-Post Systems



Over-the-Post Systems




DISTRIBUTED THROUGH **DW DISTRIBUTION**

TRADITIONAL SERIES


Lengths Available: 8', 10', 12', 14', 16', 18', and 20'



C-6010
Non-Plowed
2-1/4" x 2-3/8"
Avail: FJ· SC· ENG· SS



C-6010P
Plowed 1-1/4"
2-1/4" x 2-3/8"
(Not available in 20')




C-6016
Bending Rail
2-1/4" x 2-3/8"

CLASSIC SERIES


Lengths Available: 8', 10', 12', 14', 16', 18', and 20'



C-6210
Non-Plowed
2-5/8" x 2-3/8"
Avail: FJ· SC· ENG



C-6210P1
Plowed 1-3/4"
2-5/8" x 2-3/8"




C-6216
Bending Rail
2-5/8" x 2-3/8"
Avail: 12', 16', 18', 20'

BRISTOL SERIES


Lengths Available: 8', 12', and 16'



C-6110
Non-Plowed
2-3/4" x 2-3/4"
Avail: SC



C-6110P1
Plowed 1-3/4"
2-3/4" x 2-3/4"




C-6116
Bending Rail
2-3/4" x 2-3/4"
(Comes in 20')

DISTRIBUTED THROUGH **DW DISTRIBUTION**

RICHMOND SERIES


Lengths Available: 8', 12', and 16'



C-6410
Non-Plowed
2-5/8" x 2-3/8"
Avail: SC, ENG



C-6410P1
Plowed 1-3/4"
2-5/8" x 2-3/8"




C-6416
Bending Rail
2-5/8" x 2-3/8"

GEORGIAN SERIES


Lengths Available: 8', 12', and 16'



C-6310
Non-Plowed
2-5/8" x 2-1/4"
Avail: SC





C-6310P1
Plowed 1-3/4"
2-5/8" x 2-1/4"




C-6316
Bending Rail
2-5/8" x 2-1/4"

FILLET



C-6050
1-1/4"
Flat & Crowned



C-6007
1-3/4"
Flat

DISTRIBUTED THROUGH **DW DISTRIBUTION**

COFFMAN® STAIR PARTS

RAIL SERIES




CHATHAM SERIES


Lengths Available: 16'



C-6009
Non-Plowed
2-5/8" X 2-5/16"
Avail: SC



C-6009P
Plowed 1-1/4"
2-5/8" X 2-5/16"



CRAFTSMAN SERIES

Lengths Available: 8', 12', and 16'
(Varies from 8' - 20' by profile)




C-6700
Non-Plowed
2-1/2" X 1-5/8"
Avail: FJ, SC



C-6700P
Plowed 1-1/4"
2-1/2" X 1-5/8"



C-6700P1
Plowed 1-3/4"
2-1/2" X 1-5/8"




C-6100
Non-Plowed
2-1/4" X 1-5/8"
Avail: SC




C-6100P
Plowed 1-1/4"
2-1/4" X 1-5/8"




C-6840
Non-Plowed
2-5/8" X 1-5/8"
Avail: FJ, SC




C-6840P
Plowed 1-1/4"
2-5/8" X 1-5/8"



C-6816
Bending Rail
2-5/8" X 1-5/8"




C-6600
Non-Plowed
2-7/16" X 2-1/4"



DISTRIBUTED THROUGH DW DISTRIBUTION


SHOE RAIL

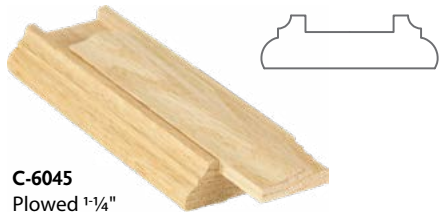

C-6045
Plowed $1\frac{1}{4}"$
 $2\frac{1}{2}" \times \frac{3}{4}"$
Avail: FJ



C-6006
Plowed $1\frac{3}{4}"$
 $2\frac{5}{8}" \times 2\frac{1}{4}"$
Avail: FJ

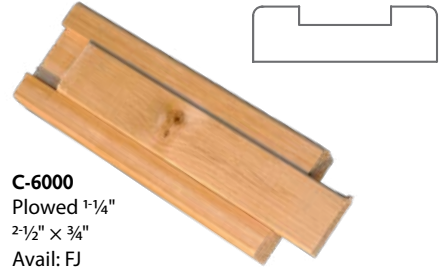

C-6000
Plowed $1\frac{1}{4}"$
 $2\frac{1}{2}" \times \frac{3}{4}"$
Avail: FJ

WALL RAIL



C-6040
 $1\frac{1}{16}" \times 1\frac{1}{2}"$
Avail: FJ



C-7023
Quarterturn
Use with C-6040



C-7024
Starting Easing
Use with C-6040



C-6042
 $2\frac{1}{4}" \times 1\frac{9}{32}"$
Avail: FJ



C-7025
Starting Easing
Use with C-6040



C-7005
Quarterturn
Use with C-6042

DISTRIBUTED THROUGH **DW DISTRIBUTION**

COFFMAN® STAIR PARTS

RAIL FITTINGS



TRADITIONAL	BRISTOL	CLASSIC	GEORGIAN	RICHMOND	CRAFTSMAN	CHATHAM
C-6010	C-6110	C-6210	C-6310	C-6410	C-6840	C-6009

STARTING FITTINGS SHOULD BE USED WITH PINTOP NEWELS AT THE BASE OF THE STAIRCASE.



	TRADITIONAL	BRISTOL	CLASSIC	GEORGIAN	RICHMOND	CRAFTSMAN	CHATHAM
	C-6010	C-6110	C-6210	C-6310	C-6410	C-6840	C-6009
VERTICAL VOLUTE	C-7031						
LEFT HAND VOLUTE USE WITH PIN TOP NEWELS	C-7030	C-7130	C-7230	C-7330	C-7430		
RIGHT HAND VOLUTE USE WITH PIN TOP NEWELS	C-7035	C-7135	C-7235	C-7335	C-7435		
STARTING EASING WITH CAP	C-7010	C-7110	C-7210	C-7310	C-7410	C-7810	
LEFT HAND TURNOUT	C-7040	C-7140	C-7240	C-7340	C-7440		
RIGHT HAND TURNOUT	C-7045	C-7145	C-7245	C-7345	C-7445		

STARTING FITTINGS

DISTRIBUTED THROUGH **DW DISTRIBUTION**



TRADITIONAL C-6010	BRISTOL C-6110	CLASSIC C-6210	GEORGIAN C-6310	RICHMOND C-6410	CRAFTSMAN C-6840	CHATHAM C-6009
-----------------------	-------------------	-------------------	--------------------	--------------------	---------------------	-------------------

TRANSITION FITTINGS ARE USED TO CREATE A CONTINUAL RAILING WITH ALL APPLICATIONS.

	COPEd END	C-7007		C-7207				
	RETURNED END	C-7009	C-7109	C-7209				
	LEVEL QUARTERTURN 90°	C-7011	C-7111	C-7211	C-7311	C-7411	C-7811	C-7C11
	UP EASING	C-7012S	C-7112S	C-7212S	C-7312S	C-7412S	C-7812S	C-7C12S
	OVEREASING	C-7013	C-7113	C-7213	C-7313	C-7413	C-7813	C-7C13
	UP EASING 90°	C-7014S	C-7114S	C-7214S	C-7314S	C-7414S		C-7C14
	OVER EASING RETURNED END	C-7016		C-7216				
	OPENING CAP USE WITH PIN TOP NEWELS	C-7019	C-7119	C-7219	C-7319	C-7419		
	TANDEM CAP USE WITH PIN NEWELS	C-7020	C-7120	C-7220	C-7320	C-7420		
	QUARTERTURN CAP 90° USE WITH PIN NEWELS	C-7021	C-7121	C-7221	C-7321	C-7421		
	LEVEL TURN 135° USE WITH PIN TOP NEWELS	C-7022	C-7122	C-7222		C-7422		
	LEVEL TURN 135°	C-7026	C-7126	C-7226				
	5° CENTER TO CENTER LEFT LH S TURN	C-7047LH	C-7147LH	C-7247LH		C-7447LH		
	5° CENTER TO CENTER RIGHT RH S TURN	C-7047RH	C-7147RH	C-7247RH		C-7447RH		

TRANSITIONAL FITTINGS

DISTRIBUTED THROUGH **DW DISTRIBUTION**

COFFMAN® STAIR PARTS

RAIL FITTINGS



TRADITIONAL C-6010	BRISTOL C-6110	CLASSIC C-6210	GEORGIAN C-6310	RICHMOND C-6410	CRAFTSMAN C-6840	CHATHAM C-6009
-----------------------	-------------------	-------------------	--------------------	--------------------	---------------------	-------------------

GOOSENECK FITTINGS ARE USED TO JOIN A HANDRAIL THAT RUNS PARALLEL WITH THE STRINGER TO A HIGHER HANDRAIL ON A LANDING OR BALCONY



GOOSENECK FITTINGS ARE USED TO JOIN A HANDRAIL THAT RUNS PARALLEL WITH THE STRINGER TO A HIGHER HANDRAIL ON A LANDING OR BALCONY							
LEFT HAND 2 RISER NO CAP 90°	C-7071			C-7371			
RIGHT HAND 2 RISER NO CAP 90°	C-7076			C-7376			
2 RISER WITH TANDEM CAP USE WITH PIN NEWELS	C-7089		C-7289	C-7389	C-7389		
2 RISER NO CAP	C-7099	C-7199	C-7299	C-7399	C-7499	C-7899	C-7C99
LEFT HAND 90° 2 RISER WITH CAP USE WITH PIN TOP NEWELS	C-7060		C-7260				
RIGHT HAND 90° 2 RISER WITH CAP USE WITH PIN TOP NEWELS	C-7065		C-7265				

GOOSENECK FITTINGS

DISTRIBUTED THROUGH DW DISTRIBUTION



TRADITIONAL	BRISTOL	CLASSIC	GEORGIAN	RICHMOND
C-6010	C-6110	C-6210	C-6310	C-6410

GOOSENECK FITTINGS ARE USED TO JOIN A HANDRAIL THAT RUNS PARALLEL WITH THE STRINGER TO A HIGHER HANDRAIL ON A LANDING OR BALCONY



LEFT HAND 2 RISER WITH CAP 135° USE WITH PIN TOP NEWELS	C-7061		C-7261			GOOSENECK FITTINGS CONT.
RIGHT HAND 2 RISER WITH CAP 135° USE WITH PIN TOP NEWELS	C-7066		C-7266			
LEFT HAND 2 RISER WITH CAP USE WITH PIN TOP NEWELS	C-7081		C-7281			
RIGHT HAND 2 RISER WITH CAP USE WITH PIN TOP NEWELS	C-7086		C-7286			
2 RISER WITH CAP USE WITH PIN TOP NEWELS	C-7097		C-7297			

DISTRIBUTED THROUGH **DW DISTRIBUTION**

COFFMAN® STAIR PARTS


ROSETTES, STARTING STEPS



ROSETTES



C-7217
 $5\frac{3}{8}" \times 5\frac{3}{8}" \times \frac{3}{4}"$
 Top panel width $4\frac{1}{2}"$

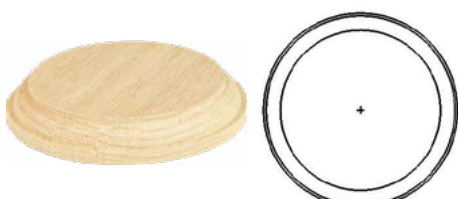

C-7317
 $4\frac{5}{8}" \times 4\frac{5}{8}" \times \frac{3}{4}"$
 Top panel width $3\frac{3}{4}"$



C-7337
 $4" \times 5\frac{1}{2}" \times \frac{3}{4}"$
 Top panel width $3\frac{1}{8}"$



C-7237
 $4\frac{5}{16}" \times 6\frac{3}{16}" \times \frac{3}{4}"$
 Top panel width $3\frac{1}{2}"$



C-7318
 $4\frac{3}{16}" \times 5\frac{3}{8}" \times \frac{3}{4}"$
 Top panel width $3\frac{5}{16}"$



C-7227
 $4\frac{3}{16}" \times 4\frac{3}{16}" \times \frac{3}{4}"$

STARTING STEPS

All Coffman Starting Steps are shipped with the necessary cove and shoe moulding.
 Single Bullnose Steps are Reversible and can be trimmed to length.



C-8010
 Usable with all Standard
 Turnouts and Volutes
 Avail: 48", 54", 60", and 72"



C-8015
 Usable with all Standard
 Turnouts and Volutes
 Avail: 48", 54", and 60"

C-8016
 Usable with all Standard Turnouts
 and Volutes as well as adjustable sizes
 for exact finishing fit
 Avail:
 48" (trim from 43" to 48")
 53" (trim from 48" to 53")
 58" (trim from 53" to 58")



C-8030
 Usable for Post-to-Post
 systems and works
 well
 with Box Newels
 Avail: 48" and 60"

DISTRIBUTED THROUGH **DW DISTRIBUTION**

SWAGELESS FITTINGS



803973
Tensioning Level
Fitting



803972
Non-Tensioning Level Fitting



803975
Tensioning Rake
Fittings



803974
Non-Tensioning Rake Fittings

HOLLOW TUBES



Tube-065
5/8" X 96" — SAT, SS, BLK, AG
5/8" X 60" — SAT



Tube-050
1/2" X 96" — SAT, SS, AG
1/2" X 240" — SS


CABLE KIT SERIES - 102



SL-10205	5' KIT	SILVER LININGS CABLE RAIL KIT - 5'	803964
SL-10210	10' KIT	SILVER LININGS CABLE RAIL KIT - 10'	803965
SL-10215	15' KIT	SILVER LININGS CABLE RAIL KIT - 15'	803966
SL-10220	20' KIT	SILVER LININGS CABLE RAIL KIT - 20'	803967
SL-10225	25' KIT	SILVER LININGS CABLE RAIL KIT - 25'	803968
SL-10230	30' KIT	SILVER LININGS CABLE RAIL KIT - 30'	803969
SL-10240	40' KIT	SILVER LININGS CABLE RAIL KIT - 40'	803970
SL-10250	50' KIT	SILVER LININGS CABLE RAIL KIT - 50'	803971



DISTRIBUTED THROUGH **DW DISTRIBUTION**

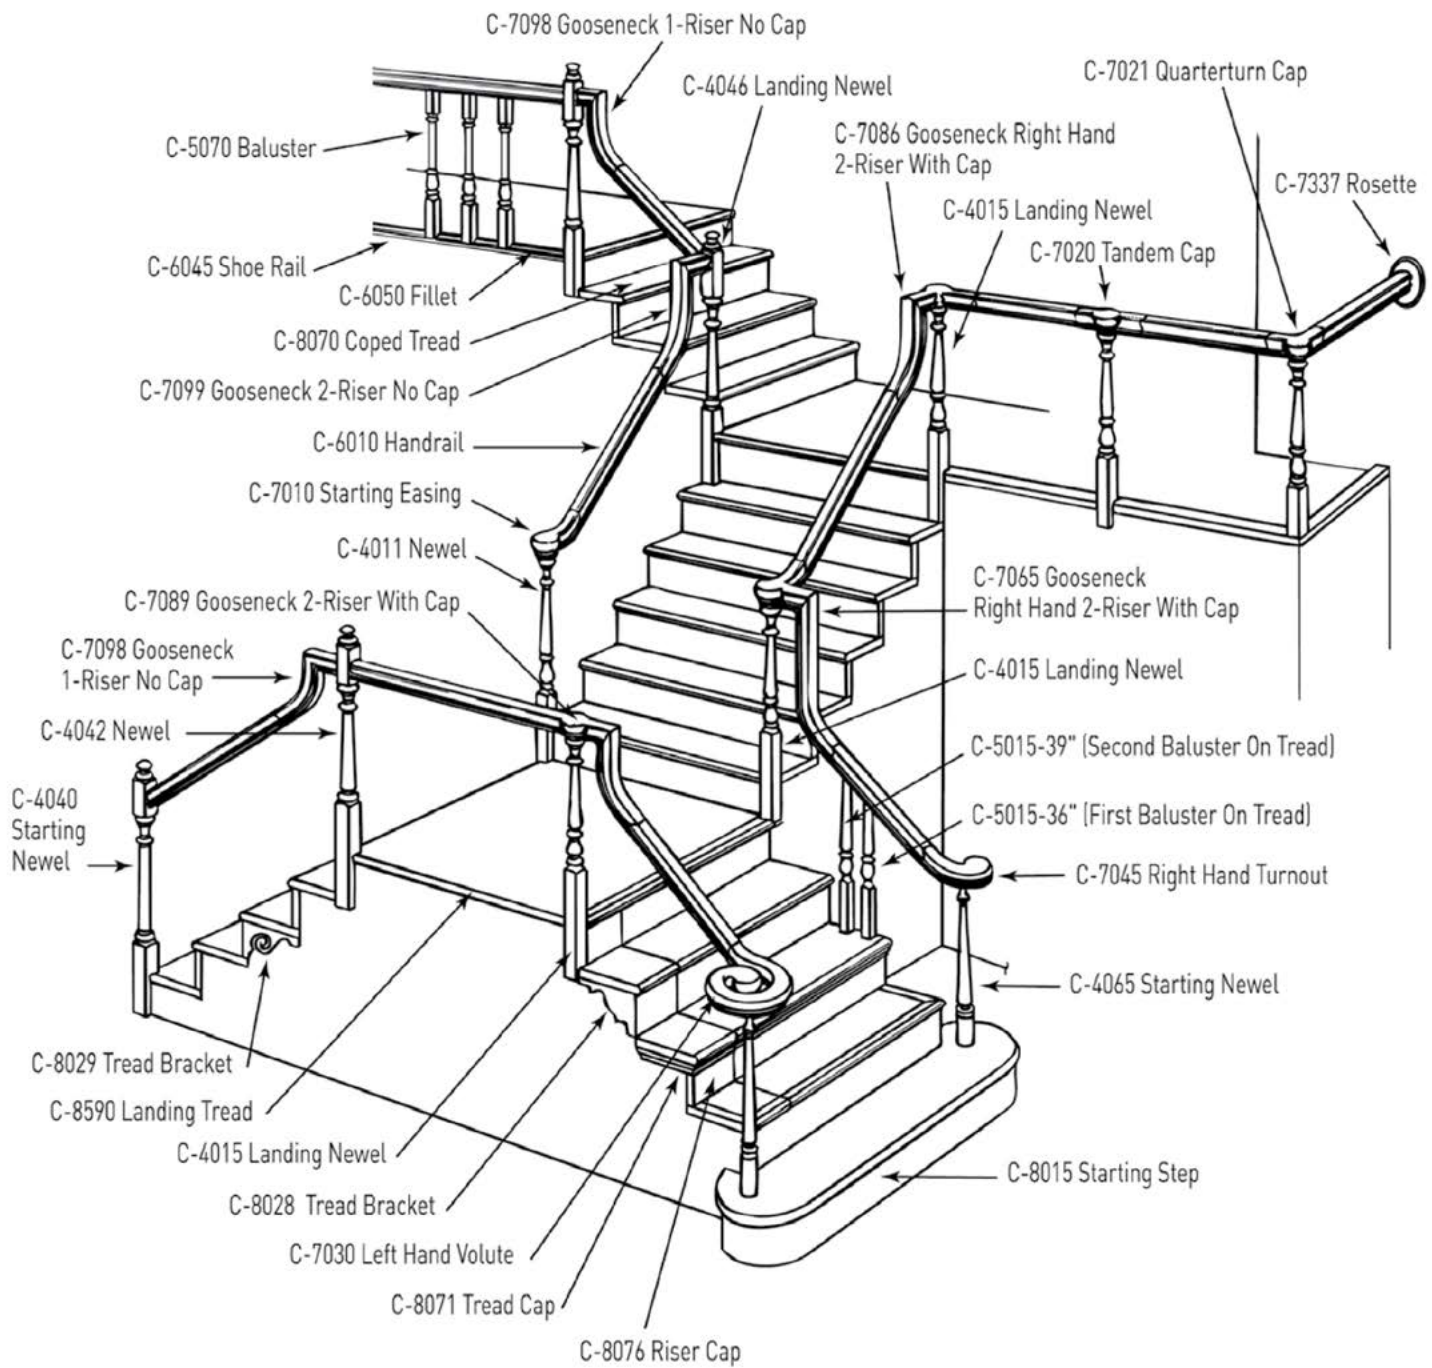




DOOR & MILLWORK

ATTIC STAIRS

HUSKY

DISAPPEARING STAIRWAY

Selected materials, good workmanship and careful inspection all combine to give you a quality stairway.

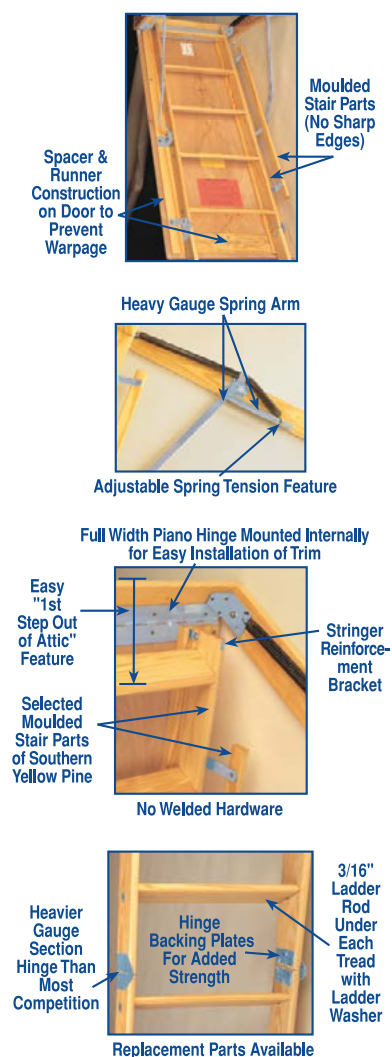

Insist on Husky Disappearing Stairway



THE SUCCESS OF OUR COMPANY STANDS ON THE QUALITY OF EVERY STAIRWAY WE MAKE.

- ★ **Pre-drilled Installation Holes**
- ★ **9½" Tread Rise on All Husky Stairs**
- ★ **Easy First Step Down From Attic for Personal Safety**
- ★ **More Treads for Easier Access**

Every HUSKY Features:

Full Width Heavy Duty Piano Hinge

That means far more strength and rigidity than any other type of stairway hinge now in use. Cuts out air leakage at head of stair, and does not interfere with trim carpenter.

¾" Steel Ladder Rod Under Each Tread

Including large washers that keep HUSKY stairs rigid and prevent bending or separation under heavier loads.

Selected Kiln Dried Southern Pine Lumber

All wood parts selected for density and load bearing capacity.

Moulded Stringers, Handrail, and Treads

Eased edges practically eliminate splinters and enhance Finished Millwork Appearance.

Re-inforced Door Panel

Safety Locknut to Secure Spring Arm to Ladder Section

Adjustable Spring Tension

Nuts, Bolts, and Hardware Plated or Painted to Prevent Rust

Completely Assembled, Ready to Install with Instructions Supplied

Optional Features

R-6 Insulation Panel

Fire Resistant Door & Well Sides

Class A - Flame spread not over 25" in 30 minutes by UL

Double Section Hinges (Model 655 only)

Increases weight capacity to 350 lbs.

Weather Stripping


There's A Husky That's Right For You. Three Great Models To Choose From!

MODEL 444: 1x4 Treads, 1x4 Stringer, 1x4 Frame Rated 250 lbs.

MODEL 544: 1x5 Treads, 1x4 Stringer, 1x4 Frame Rated 250 lbs.

MODEL 655: 1x6 Treads, 1x5 Stringer, 1x5 Frame Rated 300 lbs.

(Rated 350 lbs. with double section hinges)

	Rough Opening	Ceiling Height	# of Treads ¹	A Landing Space ²	B Projection	Available in Models and lbs. per Unit			R-6 Insulation Panel	Fire Resistant Door & Well Sides	Double Section Hinges ³	Weather Stripping
						444	544	655				
	22" X 48"	8'5"	10	56"	60"	54	56	64	Opt.	Opt.	Opt.	Opt.
	22" X 54"	8'9"	11	58"	66"	58	60	67	Opt.	Opt.	Opt.	Opt.
	22" X 54"	10'	13	65"	79"	63	65	70	Opt.	Opt.	Opt.	Opt.
	22" X 60"	9'3"	11	61"	72"	N/A	N/A	70	Opt.	Opt.	Std.	Opt.
	22" X 60"	10'8"	13	70"	80"	N/A	N/A	75	Opt.	Opt.	Std.	Opt.
	25½" X 48"	8'5"	10	56"	60"	55	60	68	Opt.	Opt.	Opt.	Opt.
	25½" X 54"	8'9"	11	58"	66"	62	65	70	Opt.	Opt.	Opt.	Opt.
	25½" X 54"	10'	13	65"	79"	66	68	84	Opt.	Opt.	Opt.	Opt.
	25½" X 60"	9'3"	11	61"	72"	N/A	N/A	79	Opt.	Opt.	Std.	Opt.
	25½" X 60"	10'8"	13	70"	80"	N/A	N/A	84	Opt.	Opt.	Std.	Opt.
	30" X 54"	8'9"	11	58"	66"	N/A	N/A	84	Opt.	Opt.	Opt.	Opt.
	30" X 54"	10'	13	65"	79"	N/A	N/A	92	Opt.	Opt.	Opt.	Opt.
	30" X 60"	8'9"	11	58"	66"	N/A	N/A	94	Opt.	Opt.	Opt.	Opt.
	30" X 60"	9'3"	11	61"	72"	N/A	N/A	91	Opt.	Opt.	Std.	Opt.
	30" X 60"	10'	13	65"	79"	N/A	N/A	96	Opt.	Opt.	Opt.	Opt.
	30" X 60"	10'8"	13	70"	80"	N/A	N/A	96	Opt.	Opt.	Std.	Opt.



Designed for residential use only.

1 - Most of the competition has 1 or 2 treads less.

2 - It is recommended adding 18" to the landing space dimensions for safe ascent or descent of the stairway.

3 - Model 655 only, Double section hinges increases the capacity from 300# to 350#.

JOB TESTED IN OVER A MILLION INSTALLATIONS THROUGHOUT THE NATION AND SEVERAL FOREIGN COUNTRIES.

LOUISVILLE LADDER
ELITE ALUMINUM ATTIC LADDER



ELITE |  **MODEL AL2240MG**

ALUMINUM ATTIC LADDER

TYPE IAA

375 LBS
LOAD CAPACITY
(Includes weight of user plus materials)

**NEW
PRODUCT**



T-HANDLE
FOR EASY
ACCESS

WITH
**INSULATION
PACKAGE** AND
**WIDER
CLEARANCE**

**22" WIDE
OPENING**



WEATHER STRIPPING
THAT **REDUCES
ENERGY LOSS**



ELITE


 MODEL **AL2240MG**


1 Lighter Aluminum Frame
 Pre-drilled holes for easier installation.



2 Smooth Operation
 Easier to open and close. Door with gas piston system.



3 Energy Efficiency
 Weather stripping that reduces energy loss.



4 Adjustable Shoes
 Fits heights 7-ft 8 in to 10-ft 3-in.



5 Safety
 Aluminum handrail for a comfortable transition.



AL2240MG FLYER 2023 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2240MG	7' 8"	10' 3"	22.5" X 54"	67"	74"	3"	40.8	6.6

LOUISVILLE LADDER

ENERGY EFFICIENT ALUMINUM ATTIC LADDER



ENERGY
EFFICIENT



MODEL
AL2540MG-R10

ALUMINUM ATTIC LADDER

TYPE IAA

375 LBS
LOAD CAPACITY

(Includes weight of user plus materials)

**NEW
PRODUCT**



T-HANDLE
FOR EASY
ACCESS

WITH
INSULATION
PACKAGE AND
WIDER
CLEARANCE

25" WIDE
OPENING



**R10
INSULATED
DOOR**



WEATHER STRIPPING
THAT **REDUCES**
ENERGY LOSS

LOUISVILLE
LADDER
**BUILT TO
BE
ABOVE**

ANSI
Meets or exceeds requirements
of American National Standards
ANSI A14.9



ENERGY EFFICIENT



MODEL
AL2540MG-R10



1 Lighter Aluminum Frame
Pre-drilled holes for easier installation.



2 Smooth Operation
Easier to open and close. Door with gas piston system.



3 Superior Energy Efficiency
R10 insulated door with weather stripping that reduces energy loss.



4 Adjustable Shoes
Fits heights 7-ft 8 in to 10-ft 3-in.



5 Safety
Aluminum handrail for a comfortable transition.



AL2540MG-R10 FLYER 2023 © Louisville Ladder, Inc. All rights reserved.

MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	SWING CLEARANCE	STEP DEPTH	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)
	MIN	MAX						
AL2540MG-R10	7' 8"	10' 3"	25.5" X 54"	67"	74"	3"	62.4	8.9

THE TITAN

Strong and Durable 375 lb Load Capacity



These heavy duty aluminum attic stairs are made with high quality aluminum and offer a limited lifetime warranty on the springs and aluminum sections. The TITAN gives extra utility to what is already the best value component in a home: valuable attic storage.

OVERVIEW

- / 375 lb duty rating
- / Heavy duty aluminum sections
- / Standard Energy-Saver R-3 Door Panel
- / Adjustable Foot Support with rubberized foot pads
- / Meets or exceeds **ANSI 14-9 Standards for Attic Stairs**


FEATURES

- / Fully assembled and **ready to install**
- / Adjustable spring tension
- / Full-width continuous hinge
- / Heavy duty galvanized steel hardware
- / Pull-down rod with eye hook
- / Secure easy grip handrail
- / CARB certified plywood
- / **Lifetime Spring Warranty**


OPTIONS

- / Optional 12' Ceiling height
- / Optional Fire Retardant treated panels compliant with ASTM E84


Dimensions
& Available
Sizes



ENERGY-SAVER R-3 DOOR PANEL

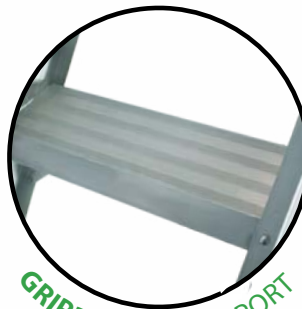

GRIPPED STEP SUPPORT

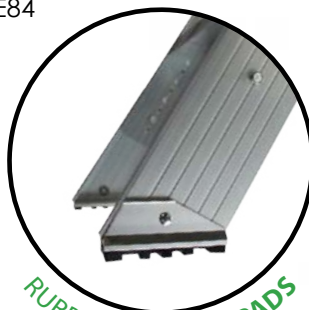

RUBBERIZED FOOT PADS

Residential use only



ATTIC STAIRS

FAKRO®

ATTIC STAIRS

LWB WOOD FOLDING ATTIC LADDER



WOODEN FOLDING ATTIC LADDER

- FEATURES
- insulated door ready for paint
 - weather seal gasket
 - non-slip steps
 - handrail
 - additional accessories available — pages 35-38
 - 1 year warranty



LWB

BASIC-INSULATED

The **LWB** model is a basic, insulated attic ladder built from pine wood. It provides easy access to attics without the hassle of using a big step ladder. Each ladder is equipped with a handrail, a door that keeps out the cold, and a special seal that prevents heat loss.

5.0

R-value

max

350


lbs

maximum capacity: 350 lbs
hatch thickness: 1 3/8"

ATTIC LADDER DIMENSIONS

LWB		22½"x54"	25"x54"	30"x54"
Manufacturer's part number		869193	869194	869195
Ceiling height	H	8' – 10'4"		
Rough opening	AxB	22½"x54"	25"x54"	30"x54"
Outside frame dimensions		22"x53¾"	24½"x53½"	29½"x53½"
Inside frame dimensions		20½"x51¾"	23" x 51¾"	28"x51¾"
Projection	R	67 ½"		
Landing space	C	50 ½"		
Folded ladder height	K	10 7/8"		
Board movement after opening	P	5/8"		
Frame height		1"		
Approx. Weight (lbs)		59	61	65
Step length	E	13 3/8"		
Step width		3 1/8"		
Step thickness		7/8"		
Distance between steps	G	9 7/8"		

Available only in sizes given above.

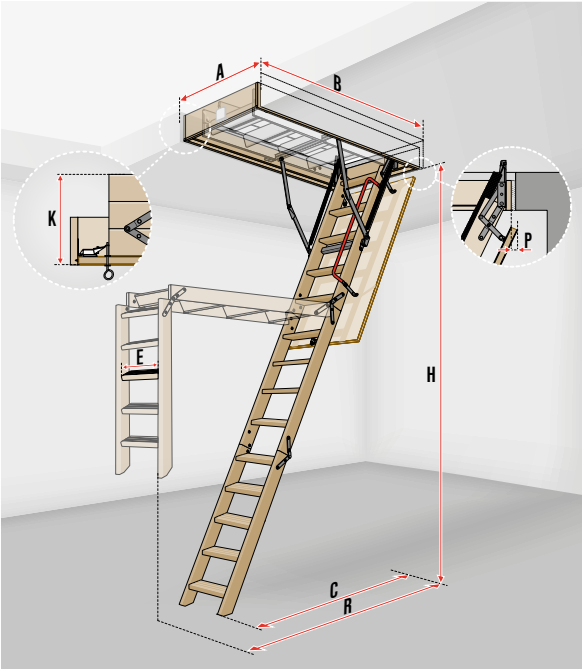

METAL FOLDING ATTIC LADDER



insulated door ready for paint



weather seal gasket



plastic ends



non-slip steps



handrail



additional accessories available — pages 35-38



1 year warranty



LMB
BASIC
-INSULATED

The **LMB** model is a basic insulated metal attic ladder. This reliable ladder provides easy access to your attic space with its convenient handrail, insulated door, and weather seal gasket. Designed for functionality and energy efficiency, it ensures both safety and comfort.

maximum capacity: 375 lbs
hatch thickness: 1"

ATTIC LADDER DIMENSIONS

LMB		22½"x54"	25"x54"
Manufacturer's part number		869263	869264
Ceiling height	H	7' 9 7/8" – 10'3"	
Rough opening	AxB	22½"x54"	25"x54"
Outside frame dimensions		22"x53½"	24½"x53½"
Inside frame dimensions		20½"x51¾"	23"x51¾"
Projection	R	65 5/8"	
Landing space	C	50 ½"	
Folded ladder height	K	9½"	
Frame height		5½"	
Approx. Weight (lbs)		69	71
Step length	E	13¾"	
Step width		3 1/8"	
Step thickness		1 1/4"	
Distance between steps		9 7/8"	

Available only in sizes given above.



WOODEN FOLDING ATTIC LADDER

NEW!

LTK
ENERGY

10
R-value

max
375
lbs

System of adjusting the ladder length to the ceiling height after cutting (up to 1 ½ in.)

Double gasket system guarantees an effective seal.

Hinges automatically adjust the ladder from compact to comfortable as the ladder self-adjusts away from the surface of the door when unfolded.

Sandwich insulated lid provides excellent thermal properties.

The **LTK Energy** model is an energy-efficient attic ladder that is highly recommended for projects emphasizing energy savings, particularly those concerned with heat loss. The LTK is the perfect solution for creating a barrier between a cool attic and the heated living space below

FEATURES



super thermo insulated door with white finish



plastic ends



two weather seal gaskets



handrail



non-slip steps



ladder length adjustment after cutting



varnished ladder



2 year warranty

R-value
with optional upper hatch




Details p.37

fully assembled and ready for quick installation in the ceiling



LTK ENERGY – DIAGRAM

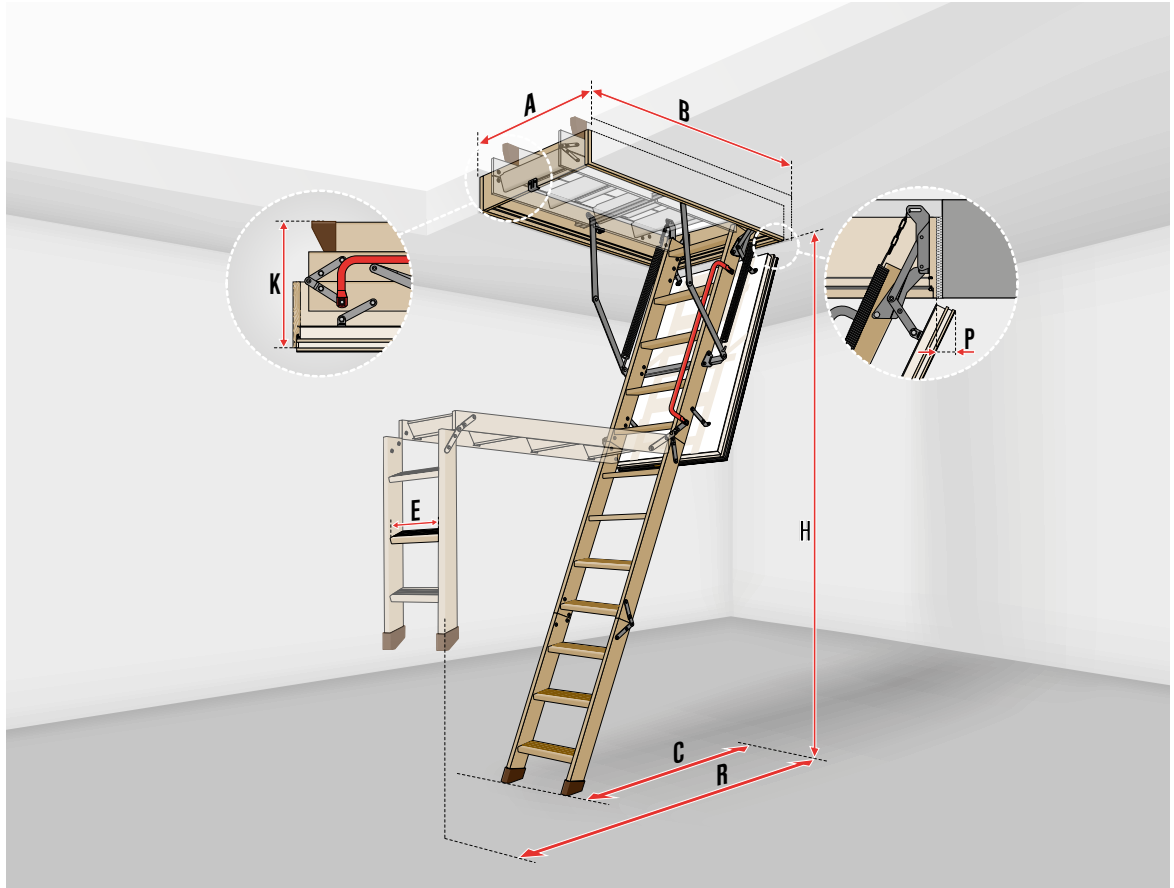

ATTIC LADDER DIMENSIONS

							Step length	E	13 3/8"
							Step width		3 1/8"
							Step thickness		7/8"
							Distance between steps		9 7/8"
LTK Energy		22½x47	25x47	22½x54	25x54	30x54			
Manufacturer's part number		869113	869114	869115	869116	869117			
Ceiling height	H	7' 8 ½" - 9'2"		7' 11 ½" - 10'1"					
Rough opening	AxB	22½"x47"	25"x47"	22½"x54"	25"x54"	30"x54"			
Outside frame dimensions		22"x46¾"	24½"x46¾"	22"x53½"	24½"x53½"	29½"x53½"			
Inside dimensions		20½"x44 7/8"	23"x44 7/8"	20½"x51 ¾"	23"x51 ¾"	28"x51 ¾"			
Projection	R	64 3/16"		69 9/16"					
Landing space	C	49 ½"		53 5/8"					
Folded ladder height	K	13 13/16"							
Board movement after opening	P	1"							
Frame height		7 1/16"							
Approx. Weight	lbs	67	72	74	77	83			

Technical specification:

maximum loading: 375 lbs

R-value: 10

insulation thickness: 2 3/8"

hatch thickness: 2 5/8"

Technical specification:
maximum loading: 375 lbs
R-value: 10
insulation thickness: 2 ¾"
hatch thickness: 2 ½"

Available only in sizes given above.

WOODEN FOLDING ATTIC LADDER

NEW!

LWF-R
NON-INSULATED
fire-retardant



The **LWF-R** is a 3-section wooden attic ladder, featuring increased fire resistance parameters.



A metal latch keeps the hatch in the closed position.

FEATURES



fire-retardant non-insulated door ready for paint



handrail



non-slip steps




1 year warranty

fully assembled and ready
for quick installation in the ceiling



LWF-R – DIAGRAM

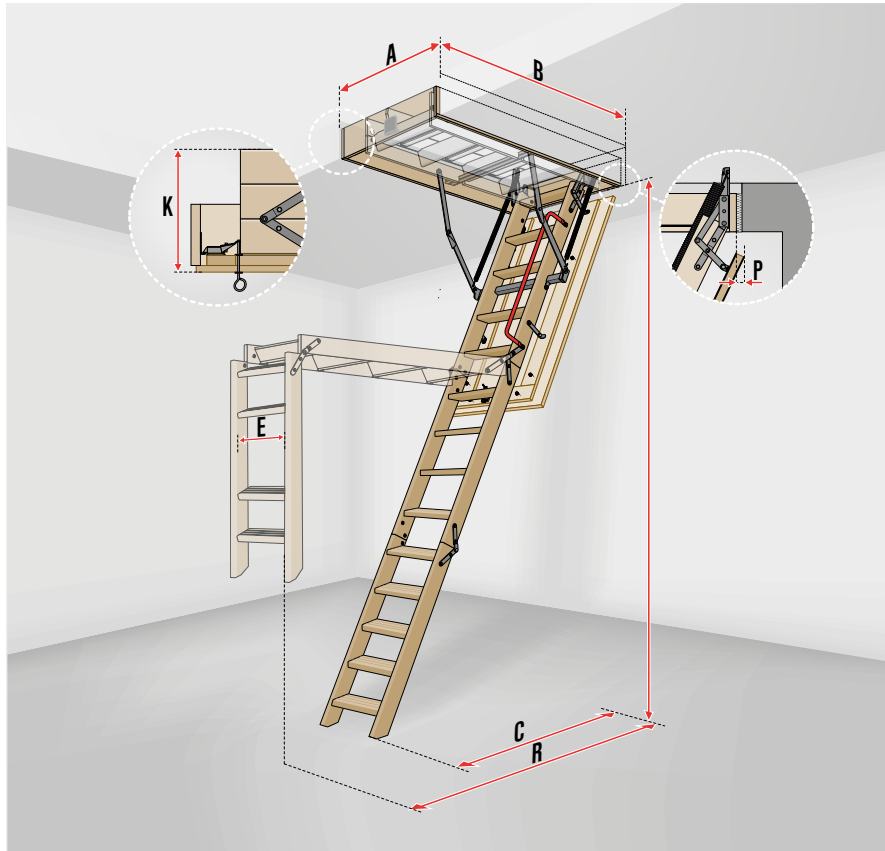

ATTIC LADDER DIMENSIONS

LWF-R Insulated		22½x54	25x54	30x54	22½x54	25x54	30x54
Manufacturer's part number		66900	66903	66905	869413	869414	869415
Ceiling height	H	8' - 10' 4"			8' 9 ½" - 10' 8"		
Rough opening	AxB	22½"x54"	25"x54"	30"x54"	22½"x54"	25"x54"	30"x54"
Outside frame dimensions		22"x53½"	24½"x53½"	29½"x53½"	22"x53½"	24½"x53½"	29½"x53½"
Inside frame dimensions		20½"x51¾"	23"x51¾"	28"x51¾"	20½"x51¾"	23"x51¾"	28"x51¾"
Projection	R	67 ½"			71¼"		
Landing space	C	49 ⅜"			51 ½"		
Folded ladder height	K	11"					
Frame height		5 ½"					
Board movement after opening	P	1 ½"					
Approx. Weight (lbs)		65,4	67,9	72,4	67	69,5	74

Step length	E	13¾"
Step width		3½"
Step thickness		7⁄8"
Distance between steps		9 7⁄8"

Technical specification:

maximum loading: 350 lbs
hatch thickness: ½"

Available only in sizes given above.

WOODEN FOLDING ATTIC LADDER

NEW!

LWF-R
INSULATED
fire-retardant

5.2
R-value

max
350
lbs

Fire
retardant

The **LWF-R Insulated fire-retardant** is a 3-section wooden attic ladder, featuring increased fire resistance parameters. The attic ladder insulated hatch is made of fire-retardant plywood.

A metal latch keeps the hatch in the closed position.

FEATURES



fire-retardant insulated door ready for paint



handrail



non-slip steps



weather seal gasket




1 year warranty

fully assembled and ready
for quick installation in the ceiling



LWF-R INSULATED – DIAGRAM

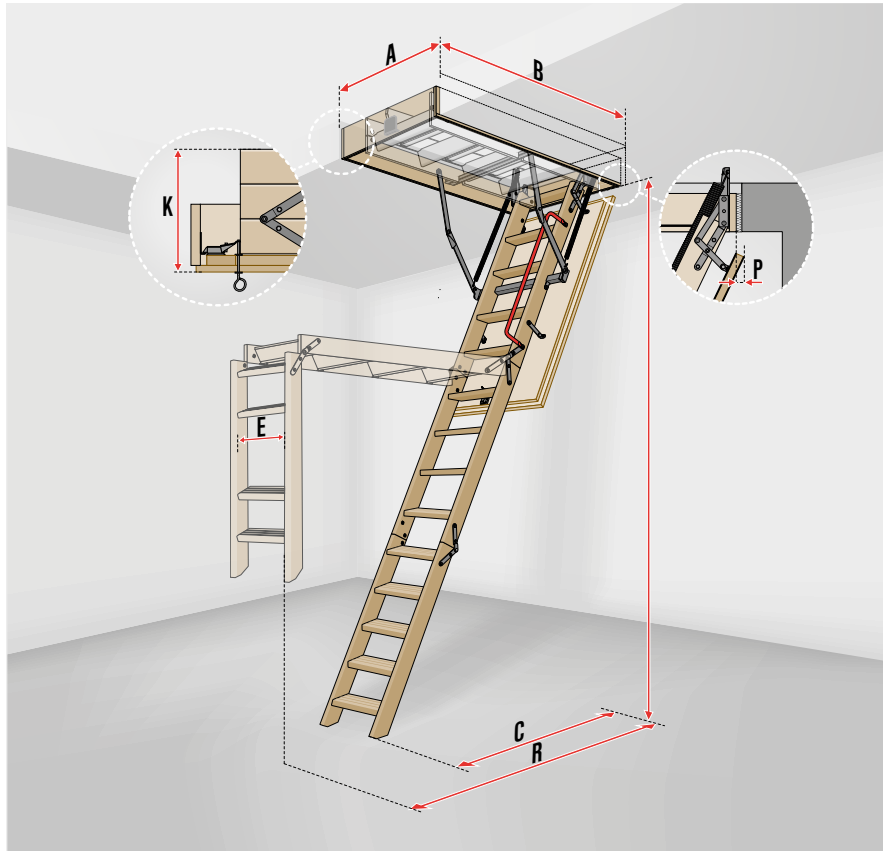

ATTIC LADDER DIMENSIONS

							
LWF-R Insulated		22½x54	25x54	30x54	22½x54	25x54	30x54
Manufacturer's part number		869109	869110	869111	869416	869417	869418
Ceiling height	H	8' - 10'4"			8' 9 ½" - 10' 8"		
Rough opening	AxB	22½"x54"	25"x54"	30"x54"	22½"x54"	25"x54"	30"x54"
Outside frame dimensions		22"x53½"	24½"x53½"	29½"x53½"	22"x53½"	24½"x53½"	29½"x53½"
Inside frame dimensions		20½"x51¾"	23"x51¾"	28"x51¾"	20½"x51¾"	23"x51¾"	28"x51¾"
Projection	R	67 ⅞"			71¼"		
Landing space	C	49 ⅞"			51 ½"		
Folded ladder height	K	11"					
Frame height		5 ½"					
Board movement after opening	P	1 ½"					
Approx. Weight (lbs)		70,4	72,9	77,9	72	74,5	79,5

Step length	E	13⅜"
Step width		3⅞"
Step thickness		⅞"
Distance between steps		9 ⅞"

Available only in sizes given above.

Technical specification:
maximum loading: 350 lbs
R-value: 5.2
insulation thickness: ⅞"
hatch thickness: 1 ½"

LMP METAL FOLDING ATTIC LADDER

METAL FOLDING ATTIC LADDER

LMP
INSULATED
12 ft. ceiling

5.2
R-value

max
375
lbs

System of adjusting the ladder length to the ceiling height after cutting (up to 1 ½ in.)

The use of special blocks secure ladder segments to prevent accidental folding.

The **LMP** model is a metal, three section, folding attic ladder designed for high ceilings, up to 12ft. It contains an unloading mechanism hidden in the handrail that supports the folding and unfolding of the ladder.

Last step placed high in the box ensures a comfortable entrance to the attic.

Ladder intended for installation in high ceilings.

Safe use and unfolding of the ladder thanks to a brake mechanism incorporated into the handrail.

FEATURES



insulated door with white finish



plastic ends



weather seal gasket



ladder unloading mechanism, built into the handrail



non-slip steps



intended for installation in high ceilings



ladder length adjustment after cutting



additional accessories available – pages 35-38



2 year warranty

R-value
with optional upper hatch



Details p.37

fully assembled and ready for quick installation in the ceiling



LMP – DIAGRAM



ATTIC LADDER DIMENSIONS

				
LMP		22 1/2 x 56 1/2	25 x 56 1/2	30 x 56 1/2
Manufacturer's part number		869331	869332	869333
Ceiling height	H	9'10" - 12'		
Rough opening	AxB	22 1/2" x 56 1/2"	25" x 56 1/2"	30" x 56 1/2"
Outside frame dimensions		22" x 56"	24 1/2" x 56"	29 1/2" x 56"
Inside frame dimensions		20 1/2" x 54 3/8"	22 7/8" x 54 3/8"	28" x 54 3/8"
Projection	R	77 1/8"		
Landing space	C	57 1/8"		
Folded ladder height	K	12 5/8"		
Frame height		7 1/8"		
Approx. Weight (lbs)		102	108	114

Step length	E	13 3/8"
Step width		3 1/8"
Step thickness		1 1/4"
Distance between steps		9 1/2"

Technical specification:
maximum loading: 375 lbs
R-value: 5.2
insulation thickness: 1 1/8"
hatch thickness: 1 3/8"

Available only in sizes given above.

LST METAL SCISSOR ATTIC LADDER

METAL SCISSOR ATTIC LADDER

LST
INSULATED

5.2
R-value

max
350
lbs

The **LST** model is a scissor style attic ladder with a white, insulated hatch. Its construction takes up less space and requires less room to unfold. Making it perfect for small spaces (the smallest ladder size is 22"x31").

FEATURES



insulated door with white finish



weather seal gasket



white metal trim



non-slip steps



can add or detach steps



system of adjusting the ladder length to the ceiling height



quick installation in the ceiling – installation brackets



additional accessories available – pages 35-38



2 year warranty



Wooden box with metal trim and quick-installation brackets included.



Adjustment of ladder length.



Adjustable length by adding or detaching a step.

R-value
with optional upper hatch




Details p.37

fully assembled and ready for quick installation in the ceiling



LST – DIAGRAM

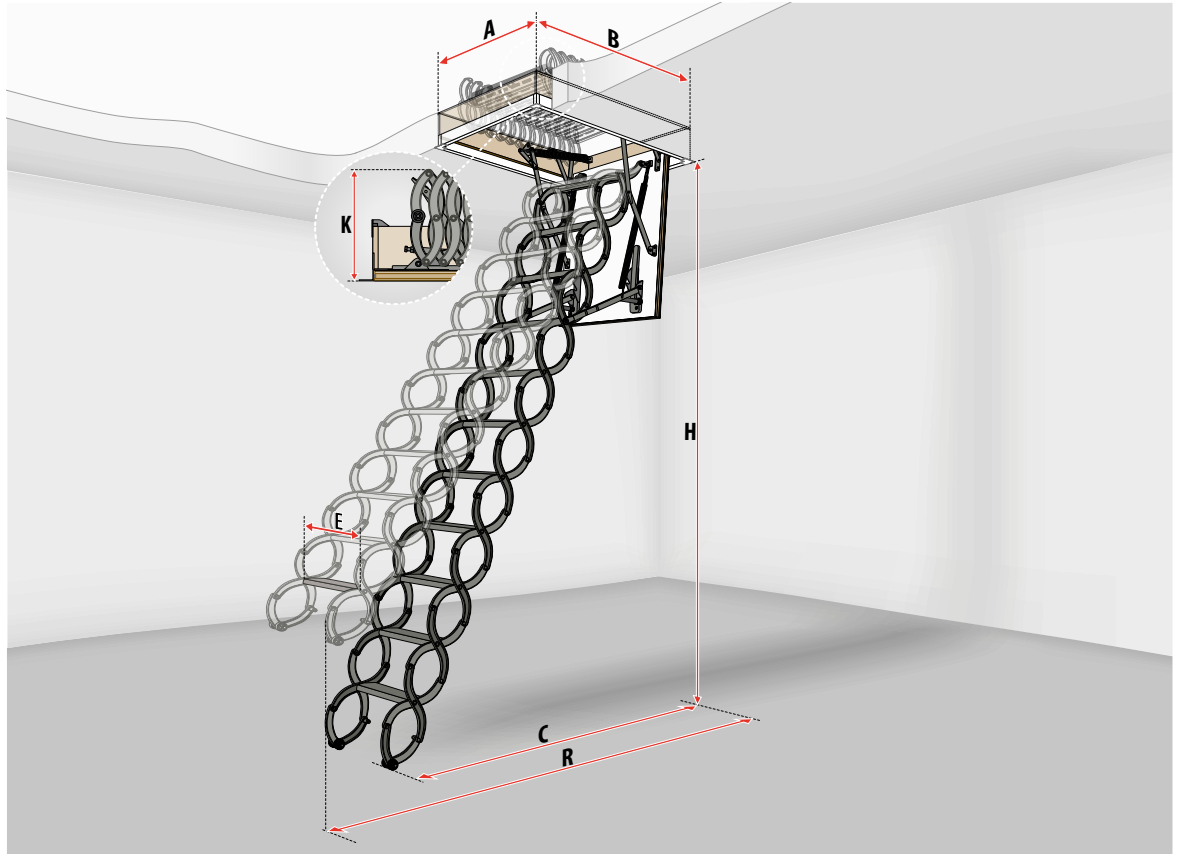

ATTIC LADDER DIMENSIONS

								
LST		22½x31½	27½x31½	22½x47	25x47	22½x54	25x54	30 ½ x 54
Manufacturer's part number		66875	66876	66820	66821	66822	66823	66877
Ceiling height	H	8'2¾" – 9'2¼"						
Rough opening	AxB	22½"x31½"	27½"x31½"	22½"x47"	25"x47"	22½"x54"	25"x54"	30 ½"x54"
Outside frame dimensions		22"x31¼"	27"x31¼"	22"x46¾"	24½"x46¾"	22"x53¾"	24½"x53¾"	30"x53¾"
Outside frame dimensions including trim		24¾"x33¼"	29½"x33¼"	24¾"x49"	26¾"x49"	24¾"x55¾"	26¾"x55¾"	31¾"x55 ¾"
Inside frame dimensions		20½"x29¼"	25½"x29¼"	20½"x44¾"	22¾"x44¾"	20½"x51½"	22¾"x51¾"	28"x51 ¾"
Projection	R	59"						
Landing space	C	57½" – 52¾"						
Folded ladder height	K	15"						
Frame height		7¾"						
Approx. Weight (lbs)		84	92	88	93	97	99	110
Step length	E	11⅞"	15"	11⅞"				15"
Step width		3⅞"						
Possibility of adding additional steps		LSS-31	LSS-38	LSS-31				LSS-38

Available only in sizes given above.

1 step removed	1 additional step	2 additional steps
7'6½"	8'2¾"	9'2¼"
9'2¼"	9'10½"	9'10½"
9'10½"	10'10"	
Ladder dimensions are equal to all sizes.		
55½"	63"	67"
53½"	51½"	59"
57½"	63"	59"

Technical specification:
maximum loading: 350 lbs
R-value: 5.2
insulation thickness: 1 ½"
hatch thickness: 1 ¾"



MM022125MC